


LOCATION MAP

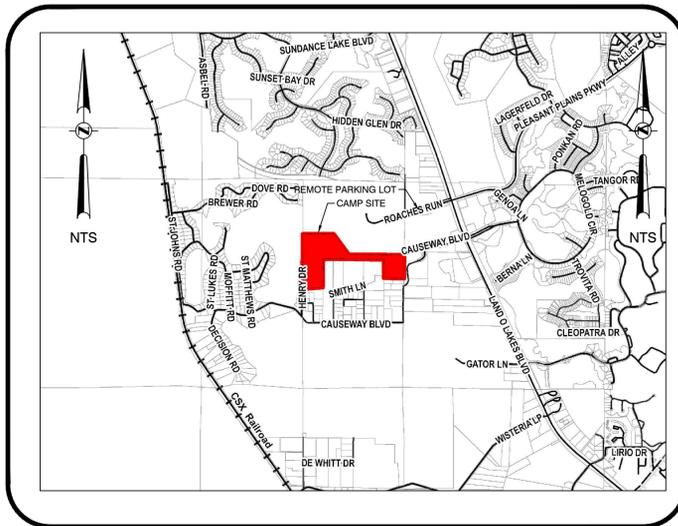

MAP REFERENCES

LEGAL DESCRIPTION: CAMP IDLEWILD

A PARCEL OF LAND BEING ALL OF TRACT 20 AND A PORTION OF TRACT 19 OF THE UNRECORDED PLAT OF "A PORTION OF THE EAST 1/2 OF SECTION 34", AND A PORTION OF THE NORTHEAST 1/4 AND SOUTHEAST 1/4 SECTION 34, TOWNSHIP 25 SOUTH, RANGE 18 EAST, PASCO COUNTY, FLORIDA, BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

BEGIN AT THE NORTHWEST CORNER OF THE SOUTHEAST 1/4 ALSO BEING THE SOUTHEAST CORNER OF THE NORTHEAST 1/4, BOTH OF SECTION 34, TOWNSHIP 25 SOUTH, RANGE 18 EAST, PASCO COUNTY, FLORIDA AND THE EAST RIGHT OF WAY LINE OF HENRY DRIVE; THENCE NORTH 00°16'48" EAST ALONG THE WEST LINE OF SAID NORTHEAST 1/4 AND THE WEST LINES OF A PORTION OF TRACT 19 AND ALL OF TRACT 20 OF THE UNRECORDED PLAT OF A PORTION OF THE EAST 1/2 OF SECTION 34 AND THE EAST LINE OF A PORTION OF HENRY DRIVE FOR 1,333.45 FEET; THENCE SOUTH 89°07'09" EAST FOR 141.29 FEET; THENCE SOUTH 70°24'09" EAST FOR 27.94 FEET; THENCE SOUTH 89°07'09" EAST FOR 608.41 FEET; THENCE SOUTH 40°44'49" EAST FOR 173.01 FEET; THENCE SOUTH 53°22'18" WEST FOR 188.00 FEET; THENCE SOUTH 07°57'53" EAST FOR 115.26 FEET; THENCE SOUTH 10°08'40" EAST FOR 125.27 FEET; THENCE SOUTH 30°00'23" EAST FOR 57.38 FEET; THENCE SOUTH 00°28'06" WEST FOR 118.81 FEET TO INTERSECT THE NORTH LINE OF TRACT 13 OF AFORESAID UNRECORDED PLAT; THENCE NORTH 89°31'54" WEST ALONG THE NORTH LINE SAID TRACT 13 FOR 274.45 FEET TO THE NORTHEAST CORNER OF AFORESAID TRACT 20 OF THE UNRECORDED PLAT; THENCE SOUTH 00°11'52" WEST ALONG THE EAST LINE OF SAID TRACT 20 AND A PORTION OF AFORESAID TRACT 19 OF THE UNRECORDED PLAT FOR 733.53 FEET; THENCE SOUTH 84°25'50" WEST FOR 536.15 FEET TO INTERSECT THE WEST LINE OF SAID TRACT 19 AND THE WEST LINE OF AFORESAID SOUTHEAST 1/4 SECTION 34 AND THE AFORESAID EAST RIGHT OF WAY OF HENRY DRIVE; THENCE NORTH 00°09'34" EAST ALONG SAID WEST LINES AND EAST RIGHT OF WAY FOR 119.97 FEET TO THE POINT OF BEGINNING. CONTAINING 925,159 SQUARE FEET OR 21.239 ACRES, MORE OR LESS.

PROFESSIONAL TEAM

CIVIL ENGINEERS/PLANNERS:

AVID GROUP
2300 CURLEW ROAD, SUITE 201
PALM HARBOR, FLORIDA 34683
PHONE: (727) 789-9500

SURVEYORS:

AVID GROUP
2300 CURLEW ROAD, SUITE 201
PALM HARBOR, FLORIDA 34683
PHONE: (727) 789-9500

ENVIRONMENTAL SCIENTIST:

MERYMAN ENVIRONMENTAL, INC.
10408 BLOOMINGDALE AVE.
RIVERVIEW, FL 33578
PHONE: (813) 626-9551

ARCHAEOLOGICAL CONSULTANT:

ARCHAEOLOGICAL CONSULTANTS, INC.
8110 BLAIKIE COURT, SUITE A
SARASOTA, FLORIDA 34220
PHONE: (941) 379-6206

GAS:

TECO PEOPLES GAS
1400 CHANNELSIDE DRIVE
TAMPA, FLORIDA 33605
PHONE: (813) 927-7719

TELEPHONE:

VERIZON FLORIDA INC.
1778 PARK AVENUE NORTH, SUITE 200
MAITLAND, FLORIDA 32751
PHONE: (407) 539-0644

CABLE:

BRIGHT HOUSE NETWORKS
30432 SR 54
WESLEY CHAPEL, FLORIDA 33543
PHONE: (813) 856-5129, x84402

POWER:

WITHLACOOCHEE RIVER ELECTRIC
COOPERATIVE, INC.
30461 COMMERCE DRIVE
SAN ANTONIO, FL 33576
PHONE: (352) 588-5115

SEWER:

PASCO COUNTY UTILITIES
7508 LITTLE ROAD
NEW PORT RICHEY, FL 34654
PHONE: (727) 847-8145

WATER:

PASCO COUNTY UTILITIES
7508 LITTLE ROAD
NEW PORT RICHEY, FL 34654
PHONE: (727) 847-8145

PRELIMINARY SITE PLAN/CONSTRUCTION PLAN/STORMWATER MANAGEMENT PLAN

FOR
CAMP IDLEWILD

SECTION 34, TOWNSHIP 25 SOUTH, RANGE 18 EAST
PASCO COUNTY, FLORIDA

Prepared For:

CAMP IDLEWILD OF FLORIDA, INC.

19811 ROACHES RUN
LAND O LAKES, FL 34638-2567

Prepared By:



CIVIL ENGINEERING 2300 CURLEW ROAD, STE 201
LAND PLANNING PALM HARBOR, FLORIDA
TRAFFIC/TRANSPORTATION 34683
LANDSCAPE ARCHITECTURE
ENVIRONMENTAL SCIENCES PHONE (727) 789-9500
SURVEYING FAX (727) 784-6662
GIS AVIDGROUP.COM

THE DESIGN AND IDEAS INCORPORATED HEREIN, AS AN INSTRUMENT OF PROFESSIONAL SERVICE, IS THE PROPERTY OF AVID GROUP AND IS NOT TO BE USED FOR ANY OTHER PROJECT WITHOUT WRITTEN AUTHORIZATION FROM AVID GROUP.

DIMENSION INFORMATION SHOULD NOT BE OBTAINED BY SCALING THE PLANS. DIMENSION INFORMATION NOT PROVIDED HEREIN CAN BE OBTAINED BY CONTACTING AVID GROUP, @ (727)789-9500.

NO.	DATE	DESCRIPTION	BY
7			
6			
5			
4			
3			
2			
1			
R E V I S I O N S			

PLAN INDEX

Sheet Number	Sheet Title
1	COVER SHEET
2	NOTES AND SPECIFICATIONS
3	DEMOLITION PLAN
4	OVERALL SITE PLAN
5	HORIZONTAL CONTROL PLAN
6	PAVING, GRADING & DRAINAGE PLAN
7	UTILITY PLAN
8	NPDES NOTES
9	NPDES DETAILS
10	DETAILS 1
11	DETAILS 2
12	CROSS SECTIONS
13	LANDSCAPE PLAN
14	LANDSCAPE DETAILS
15	LANDSCAPE NOTES
4 OF 4	TOPOGRAPHICAL AND TREE SURVEY

SITE DATA

PROPERTY OWNER: IRENE C. ROACH
19811 ROACHES RUN
LAND O LAKES, FL 34638-2567

PROJECT DEVELOPER: CAMP IDLEWILD OF FLORIDA, INC.
19811 ROACHES RUN
LAND O LAKES, FL 34638-2567

PROPERTY PARCEL ID NUMBER: A PORTION OF 34-25-18-0000-00100-0000
(SEE LEGAL DESCRIPTION)

PROPERTY ADDRESS: 7602 HENRY DRIVE

EXISTING USES: AGRICULTURE (PASTURE LAND)

EXISTING/PROPOSED FUTURE LAND USE: RES-3 (RESIDENTIAL-3 DU/AC)

EXISTING ZONING: R1MH (SINGLE-FAMILY RESIDENTIAL AND MOBILE HOME DISTRICT) & AR (AGRICULTURAL-RESIDENTIAL DISTRICT)

PROPOSED ZONING: R1MH & AR WITH CONDITIONAL USE FOR PROPOSED USE

PROPOSED USE: DAY / OVERNIGHT CAMP (150 PERSON MAX OCCUPANCY)
CU14-13 AND RDZ7108 APPROVED BY PASCO COUNTY BCC 6/24/14

AREA CALCULATIONS:

TOTAL SITE AREA:	PRE-DEVELOPMENT	POST-DEVELOPMENT
21.239 AC MOL	21.239 AC MOL	21.239 AC MOL
UPLANDS		
DEVELOPABLE AREA	14.47 AC	14.47 AC
CATEGORY II WETLANDS		
WETLAND A	0.0227 AC	0.0227 AC
WETLAND B	3.9845 AC	3.9845 AC
WETLAND C	2.685 AC	2.685 AC
WETLAND D	0.0808 AC	0.0808 AC
CONSERVATION	0.00 AC	0.00 AC
CRITICAL LINKAGES	0.00 AC	0.00 AC

* PER SWFWMD FORMAL DETERMINATION ISSUED OCTOBER 15, 2014

DIMENSIONAL REQUIREMENTS:

LOT AREA:	20,000 SF MIN
LOT WIDTH:	100 FT MIN
LOT DEPTH:	150 FT MIN
BUILDING COVERAGE:	35% MAX (R1-MH) / 25% MAX (AR)
BUILDING HEIGHT:	35 FT MAX ALL BUILDINGS

MINIMUM PERIMETER BUILDING SETBACKS:

FRONT:	30 FT (HENRY ROAD)
SIDE:	15 FT (R1-MH) / 25 FT (AR)
REAR:	30 FT (R1-MH) / 50 FT (AR)

BUILDINGS:

PHASE 1:	4,650 SF (LODGE + 2 BUNKHOUSES)
PHASE 2:	6,918 SF (6 BUNKHOUSES + BATH-HOUSE)
TOTAL:	11,568 SF

LANDSCAPING REQUIREMENTS: PER CODE. REQUIRED PERIMETER BUFFER LOCATIONS ARE DEPICTED ON THIS PLAN.

FLOOD ZONE: SITE APPEARS TO LIE WITHIN FLOOD ZONES "A", "AE" & "X", PER FEMA FLOOD INSURANCE RATE MAP (FIRM), COMMUNITY PANEL NUMBER 12101C0238 F, DATED 9/26/2014.



CAMP IDLEWILD
AVID GROUP JOB # 3077-001
DATE: 6/08/15

GENERAL CONSTRUCTION NOTES (11/29/12)

- 1. SEE SURVEY FOR SITE SPECIFIC BENCH MARK AND ELEVATION DATUM. USE DATUM NOTES THIS SHEET FOR CONVERSION.
2. LOCATIONS, DIMENSIONS AND ELEVATIONS OF EXISTING UTILITIES, STRUCTURES, AND OTHER FEATURES ARE SHOWN ACCORDING TO STANDARD UTILITY ATLAS SHEETS OR OTHER INFORMATION OBTAINED AT THE TIME OF PREPARATION OF THESE PLANS.
3. THE CONTRACTOR SHALL EXERCISE EXTREME CAUTION IN AREAS OF BURIED UTILITIES AND SHALL PROVIDE AT LEAST 48 HOURS NOTICE TO ALL UTILITY COMPANIES BEFORE PERFORMING ANY EXCAVATION.

TESTING SCHEDULE GUIDE (12/11/09)

Table with 5 columns: ITEM, TEST TYPE, TEST ID, REQUIREMENT, FREQUENCY. Rows include EMBANKMENT, UTILITY TRENCH BACKFILL UNDER ROADWAYS AND STRUCTURES, BACKFILL OF STRUCTURES, SUBGRADE, BASE, SOIL CEMENT BASE MIX DESIGN, ASPHALTIC CONCRETE.

NOTES:
1. THE CONTRACTOR SHALL NOT PAVE OVER SOIL CEMENT BASE UNTIL A 30 DAY CURING TIME HAS ELAPSED
2. SHOULD ANY OF THE INFORMATION PROVIDED HEREIN CONFLICT WITH EITHER THE RECOMMENDATIONS OF THE GEOTECHNICAL ENGINEER, AND/OR THE GEOTECHNICAL REPORT, THEN THE AFOREMENTIONED RECOMMENDATIONS WILL SUPERSEDE THIS 'TESTING SCHEDULE GUIDE'

CLEARING AND EROSION CONTROL NOTES (4/30/04)

- 1. ALL TREES TO REMAIN SHALL BE PROTECTED IN ACCORDANCE WITH LOCAL REGULATIONS PRIOR TO THE START OF ANY CONSTRUCTION ACTIVITIES.
2. THE CONTRACTOR SHALL PREPARE THE SITE AS DIRECTED BY THE GEOTECHNICAL ENGINEER PRIOR TO STARTING ACTUAL CONSTRUCTION. COPIES OF THE GEOTECHNICAL ENGINEER'S RECOMMENDATIONS AND REPORT ARE AVAILABLE THROUGH THE OWNER OR THE GEOTECHNICAL ENGINEER.
3. THE CONTRACTOR SHALL CLEAR AND GRUB ONLY THOSE PORTIONS OF THE SITE NECESSARY FOR CONSTRUCTION.

PAVING, GRADING AND DRAINAGE NOTES (4/30/04)

- 1. ALL DELETERIOUS SUBSTANCES (I.E. MUCK, PEAT, BURIED DEBRIS) SHALL BE EXCAVATED IN ACCORDANCE WITH THE PLANS AND SPECIFICATIONS, OR AS DIRECTED BY THE GEOTECHNICAL ENGINEER OR OWNER.
2. IT MAY BE NECESSARY TO FIELD ADJUST PAVEMENT ELEVATIONS TO PRESERVE THE ROOT SYSTEMS OF TREES TO BE SAVED.
3. THE CONTRACTOR IS TO SUBMIT A PROPOSED JOINTING PATTERN TO THE OWNER FOR APPROVAL PRIOR TO CONSTRUCTING CONCRETE PAVEMENT.

PAVING, GRADING & DRAINAGE TESTING AND INSPECTION REQUIREMENTS (4/30/04)

- 1. THE STORM DRAINAGE PIPING AND FILTRATION SYSTEM SHALL BE SUBJECT TO A VISUAL INSPECTION BY THE ENGINEER PRIOR TO THE PLACEMENT OF BACKFILL.
2. THE CONTRACTOR SHALL MAINTAIN THE STORM DRAINAGE SYSTEMS UNTIL FINAL ACCEPTANCE OF THE PROJECT BY THE OWNER.
3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING THE REQUIRED TESTING WITH THE GEOTECHNICAL ENGINEER.

SANITARY SEWER NOTES (12/24/09)

- 1. ALL SANITARY SEWER MAINS AND LATERALS SHALL HAVE A MINIMUM OF 36 INCHES OF COVER.
2. ALL SANITARY SEWER WORK SHALL CONFORM TO LOCAL REGULATORY STANDARDS AND SPECIFICATIONS.
3. PRIOR TO COMMENCING WORK WHICH REQUIRES CONNECTING NEW WORK TO EXISTING LINES OR APPURTENANCES, THE CONTRACTOR SHALL VERIFY LOCATION AND ELEVATION OF EXISTING CONNECTION POINT AND NOTIFY ENGINEER OF ANY CONFLICTS OR DISCREPANCIES.

SANITARY SEWER TESTING AND INSPECTION REQUIREMENTS (12/24/09)

- 1. ALL GRAVITY SEWER PIPING SHALL BE SUBJECT TO A VISUAL INSPECTION BY THE ENGINEER. CONTRACTOR SHALL NOTIFY THE ENGINEER 48 HOURS IN ADVANCE TO SCHEDULE INSPECTION.
2. ALL GRAVITY SEWER PIPING SHALL BE VIDEO TAPED AND RESULTS FURNISHED TO THE LOCAL UTILITY AND THE ENGINEER.
3. THE GRAVITY SANITARY SEWER AND ALL SERVICE LATERALS SHALL BE SUBJECT TO ADDITIONAL TESTING AS REQUIRED BY LOCAL REGULATIONS.

WATER SYSTEM NOTES (12/24/09)

- 1. ALL WATER MAINS SHALL HAVE A MINIMUM OF 36 INCHES OF COVER.
2. ALL WATER SYSTEM WORK SHALL CONFORM TO LOCAL REGULATORY STANDARDS AND SPECIFICATIONS.
3. CONFLICTS BETWEEN WATER AND STORM OR SANITARY SEWER SHALL BE RESOLVED BY ADJUSTING THE WATER LINES AS REQUIRED.
4. ALL DUCTILE IRON PIPE SHALL BE PRESSURE CLASS 350 IN ACCORDANCE WITH ANSI A 21.51 (AWWA C151) AND PIPE SHALL RECEIVE EXTERIOR BITUMINOUS COATING IN ACCORDANCE WITH ANSI A 21.51 (AWWA C151) AND SHALL BE CEMENT MORTAR LINED.

FDEP NOTES (04/02/04)

- 1. ALL PIPE, PIPE FITTINGS, PIPE JOINT PACKING AND JOINTING MATERIALS, VALVES, FIRE HYDRANTS, AND METERS INSTALLED UNDER THIS PROJECT WILL CONFORM TO APPLICABLE AMERICAN WATER WORKS ASSOCIATION (AWWA) STANDARDS.
2. ALL PUBLIC WATER SYSTEM COMPONENTS, EXCLUDING FIRE HYDRANTS, THAT WILL BE INSTALLED UNDER THIS PROJECT AND THAT WILL COME INTO CONTACT WITH DRINKING WATER WILL CONFORM TO NSF INTERNATIONAL STANDARD 61.
3. ALL PIPE AND PIPE FITTINGS INSTALLED UNDER THIS PROJECT WILL CONTAIN NO MORE THAN 8.0% LEAD, AND ANY SOLDER OR FLUX USED IN THIS PROJECT WILL CONTAIN NO MORE THAN 0.2% LEAD.

WATER SYSTEM TESTING AND INSPECTION REQUIREMENTS (04/02/04)

- 1. ALL COMPONENTS OF THE WATER SYSTEM, INCLUDING FITTINGS, HYDRANTS, CONNECTIONS, AND VALVES SHALL REMAIN UNCOVERED UNTIL PROPERLY PRESSURE TESTED AND ACCEPTED BY THE ENGINEER AND LOCAL AUTHORITIES.
2. CONTRACTOR IS RESPONSIBLE FOR ALL REQUIRED CHLORINATION/DISINFECTION AND BACTERIOLOGICAL SAMPLING IN ACCORDANCE TO ITEM 'U' ABOVE. CONTRACTOR SHALL OBTAIN CLEARANCE OF DOMESTIC WATER SYSTEM.
3. AT THE UTILITY CROSSINGS DESCRIBED IN PART II.C.1.VI ABOVE, ONE FULL LENGTH OF WATER MAIN PIPE WILL BE CENTERED ABOVE OR BELOW THE OTHER PIPELINE SO THE WATER MAIN JOINTS WILL BE AS FAR AS POSSIBLE FROM THE OTHER PIPELINE.

WATER CLEARANCE REQUIREMENTS (04/02/04)

- 1. NEW OR RELOCATED, UNDERGROUND WATER MAINS INCLUDED IN THIS PROJECT WILL BE LAID TO PROVIDE A HORIZONTAL DISTANCE OF AT LEAST THREE FEET BETWEEN THE OUTSIDE OF THE WATER MAIN AND THE OUTSIDE OF ANY EXISTING OR PROPOSED VACUUM-TYPE SANITARY SEWER, STORM SEWER, STORMWATER FORCE MAIN, OR PIPELINE CONVEYING RECLAIMED WATER REGULATED UNDER PART III OF CHAPTER 62-610, F.A.C.
2. NEW OR RELOCATED, UNDERGROUND WATER MAINS THAT ARE INCLUDED IN THIS PROJECT AND THAT WILL CROSS ANY EXISTING OR PROPOSED GRAVITY-TYPE SANITARY SEWER OR STORM SEWER WILL BE LAID SO THE OUTSIDE OF THE WATER MAIN IS AT LEAST SIX INCHES ABOVE THE OTHER PIPELINE OR AT LEAST 12 INCHES BELOW THE OTHER PIPELINE.



CAMP IDLEWILD OF FLORIDA, INC.

CIVIL ENGINEERING: 5000 CUREL ROAD, STE 201, LUDLOW PARK, PALM HARBOR, FLORIDA 34883
TRAFFIC/TRANSPORTATION SURVEYING
PHONE (727) 784-9500
FAX (727) 784-6662
AVIDGROUP.COM

CAMP IDLEWILD PASCO COUNTY, FLORIDA NOTES AND SPECIFICATIONS

Table with 11 columns: NO., DATE, DESCRIPTION, BY. Row 1: 1, 6/8/15, 3077001, R. AYERS.

NOT VALID WITHOUT ORIGINAL SIGNATURE OF REGISTERED PROFESSIONAL ENGINEER AND SEAL.
PRJ. MGR: R. AYERS
PRJ. #.: 3077001
DATE: 6/8/15

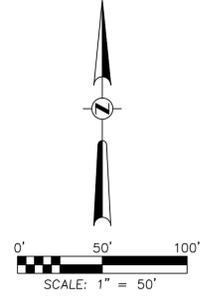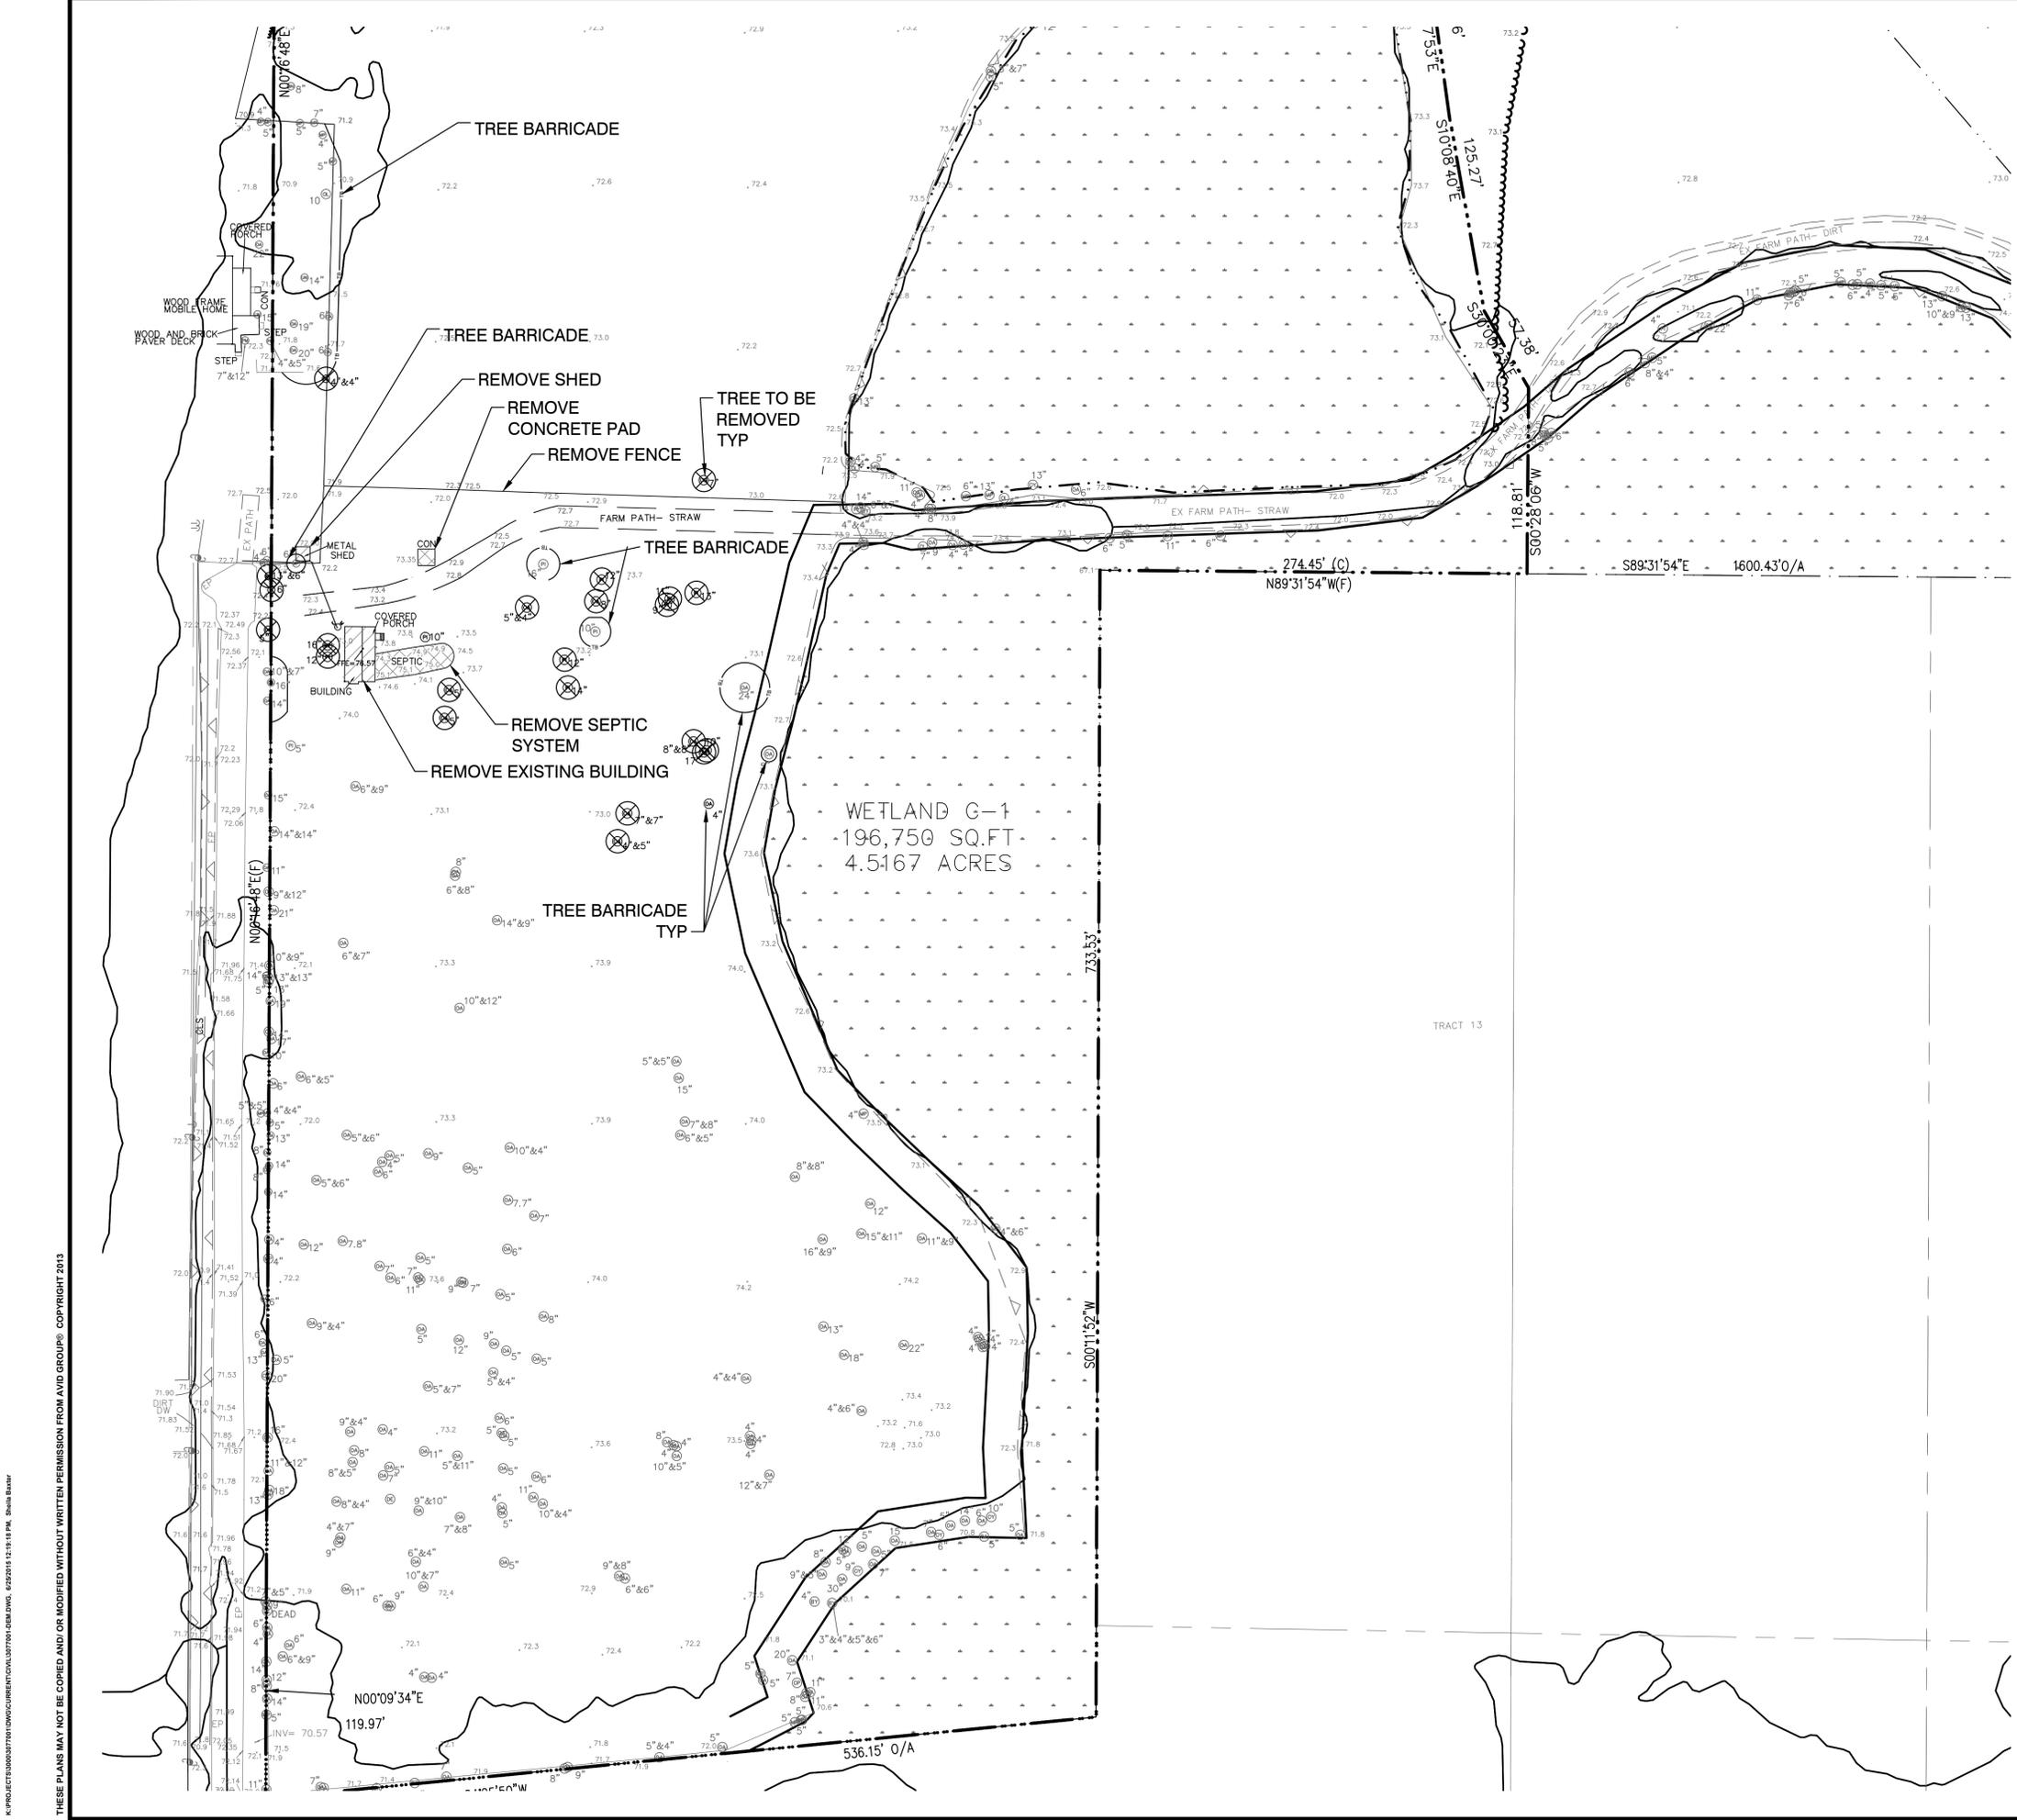

DEMOLITION LEGEND

- SITE BOUNDARY LINE
- - - CENTER LINE OF ROAD
- - - RIGHT-OF-WAY
- - - EXISTING EDGE OF PAVEMENT
- TB - TREE BARRICADE
- EROSION CONTROL
- EXISTING PAVEMENT TO BE REMOVED
- EXISTING STRUCTURE TO BE REMOVED
- EXISTING LANDSCAPE ISLAND TO BE CLEARED AND GRUBBED
- ⊗ TREE REMOVAL
- TYP TYPICAL
- HC HANDICAP
- S/W SIDEWALK
- RS' 5' RADIUS
- LF LINEAR FEET
- SF SQUARE FEET

DEMOLITION NOTES:

1. CONTRACTOR TO DEMOLISH AND REMOVE ALL IMPROVEMENTS WITHIN LIMITS OF DEMOLITION SHOWN UNLESS OTHERWISE NOTED.
2. CONTRACTOR TO ESTABLISH AND PROPERLY FLAG PROPERTY LINES PRIOR TO DEMOLITION.
3. THE CONTRACTOR SHALL UTILIZE SUITABLE EROSION CONTROL DURING DEMOLITION AND ALL PHASES OF CONSTRUCTION. SEE GENERAL NOTES AND DETAILS.
4. THE CONTRACTOR IS RESPONSIBLE FOR THE DISPOSAL OF ALL DEMOLITION DEBRIS.
5. UTILITIES TO BE PLUGGED SHALL BE FILLED WITH A MINIMUM 1.0 CUBIC FT. OF NON-SHRINK GROUT OR AS OTHERWISE APPROVED BY ENGINEER.
6. TREES SHOWN TO REMAIN SHALL MAINTAIN PROTECTIVE BARRIERS DURING DEMOLITION AND CONSTRUCTION. THESE BARRIERS SHALL BE IN ACCORDANCE WITH CURRENT CITY/COUNTY STANDARDS.
7. THE CONTRACTOR SHALL COORDINATE THE REMOVAL/RELOCATION OF EXISTING UTILITIES WITH THE OWNER OF SAID UTILITY. THIS SHALL INCLUDE WATER, SEWER, STORM DRAIN, GAS, CABLE TV, POWER AND TELEPHONE.
8. THE CONTRACTOR SHALL LOCATE ALL EXISTING UTILITIES PRIOR TO DEMOLITION AND WILL BE RESPONSIBLE FOR THE DAMAGE OF ANY ON-SITE OR OFF-SITE UTILITIES THAT ARE NOT A PART OF THIS PROJECT OR ARE NOT IDENTIFIED TO BE REMOVED.
9. THE CONTRACTOR SHALL BARRICADE THE SITE AND CONTROL TRAFFIC PER CURRENT FOOT TRAFFIC CONTROL STANDARDS.
10. REMOVAL OF ASBESTOS CONTAINING MATERIALS SHALL BE IN ACCORDANCE WITH THE REGULATORY STANDARDS AND RECOMMENDATIONS OUTLINED IN THE LIMITED ASBESTOS SURVEY REPORT PERFORMED FOR THIS SITE.
11. REMOVAL OF ALL EXISTING WATER METERS, DOUBLE CHECK VALVE ASSEMBLIES, AND GATE VALVES TO BE COORDINATED WITH THE WATER DEPT.
12. CONTRACTOR TO COORDINATE REMOVAL/RELOCATION OF EXISTING POWER POLES AND OVERHEAD WIRES.
13. REMOVE ALL FOUNDATIONS OF BUILDINGS AND SIGN POSTS TO BE DEMOLISHED.
14. CONTRACTOR IS RESPONSIBLE FOR THE PROPER OFFSITE DISPOSAL OF ALL SPOIL MATERIALS REMOVED FROM THE PROJECT SITE.
15. ANY WELLS ENCOUNTERED ON-SITE SHALL BE CAPPED BY A LICENSED WATER WELL CONTRACTOR IN ACCORDANCE WITH RULE 40D-3.531(2), F.A.C.
16. ALL DISTURBED AREAS IN THE RIGHT-OF-WAY SHALL BE SODDED.

SILT FENCE NOTE:

1. NON-TRENCHED SILT FENCES IN AREAS WHERE EXISTING TREES ARE TO BE PRESERVED.
2. SILT FENCE LOCATED ADJACENT TO BOUNDARY SHALL BE STAKED AT 1 FT. OFF PROPERTY LINE.

Always call 811 two full business days before you dig

NO.	DATE	DESCRIPTION	BY
11			
10			
9			
8			
7			
6			
5			
4			
3			
2			
1			

NOT VALID WITHOUT ORIGINAL SIGNATURE OF REGISTERED PROFESSIONAL CIVIL ENGINEER
 PROJECT MANAGER
 R. AYERS
 PROJECT # 3077001
 DATE 6/8/15

CAMP IDLEWILD OF FLORIDA, INC.

CIVIL ENGINEERING 3000 CURLEW ROAD, SUITE 201
 PASCAGO, FLORIDA 34883
 TRAFFIC/TRANSPORTATION 34883
 SURVEYING GIS





AVID GROUP

PHONE (727) 784-9500
 FAX (727) 784-6662
 AVIDGROUP.COM

CAMP IDLEWILD
PASCO COUNTY, FLORIDA
DEMOLITION PLAN

3

THESE PLANS MAY NOT BE COPIED AND/OR MODIFIED WITHOUT WRITTEN PERMISSION FROM AVID GROUP, INC. COPYRIGHT 2013

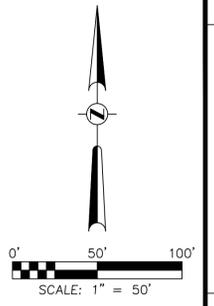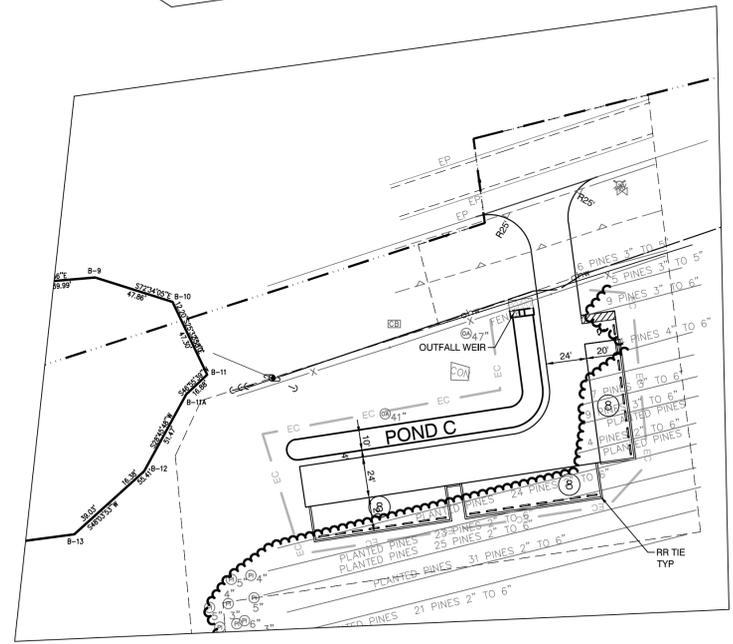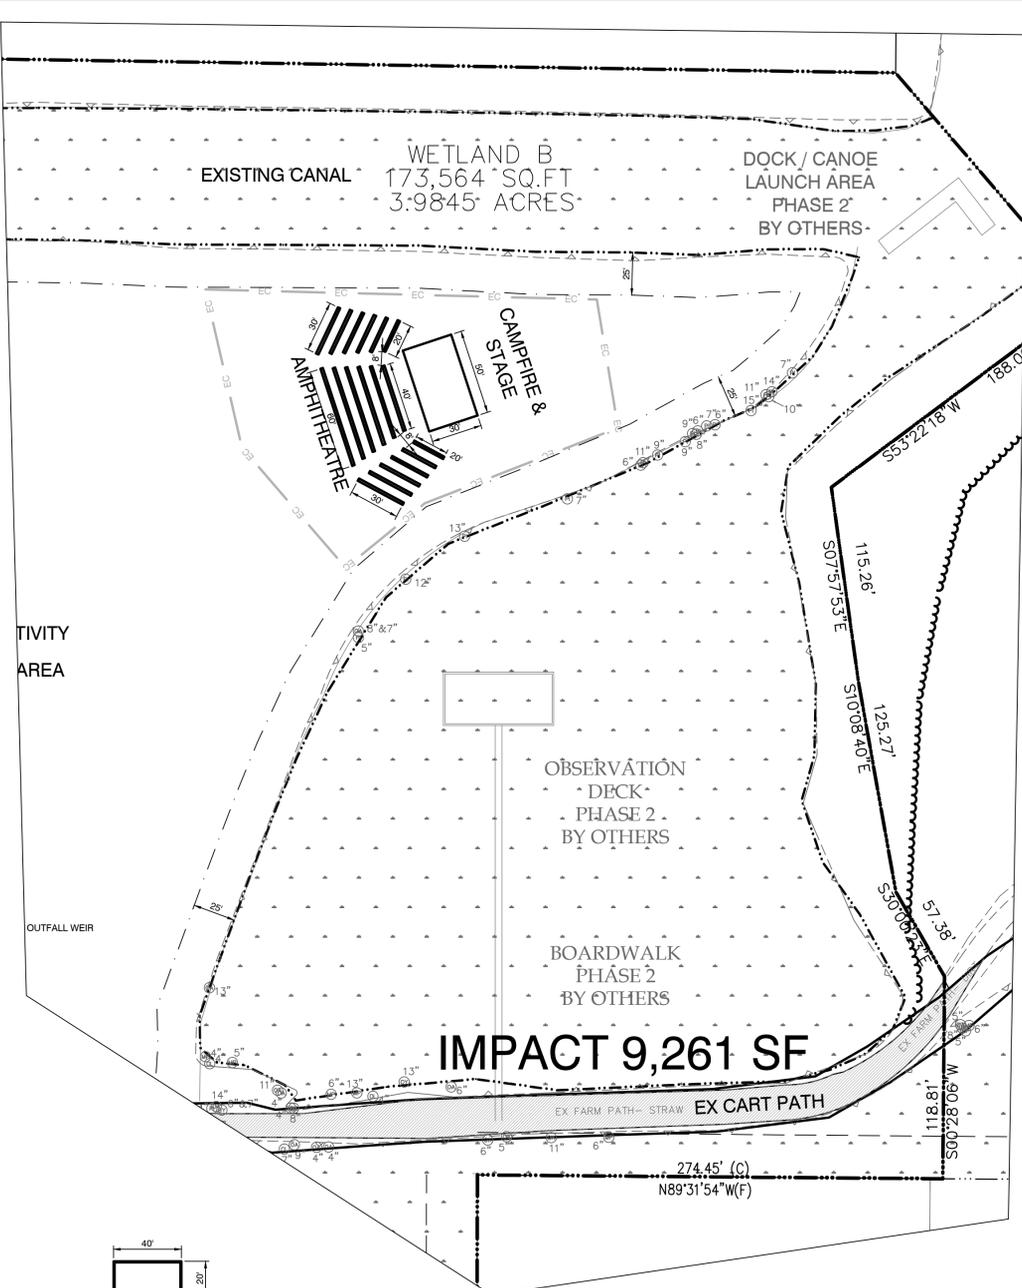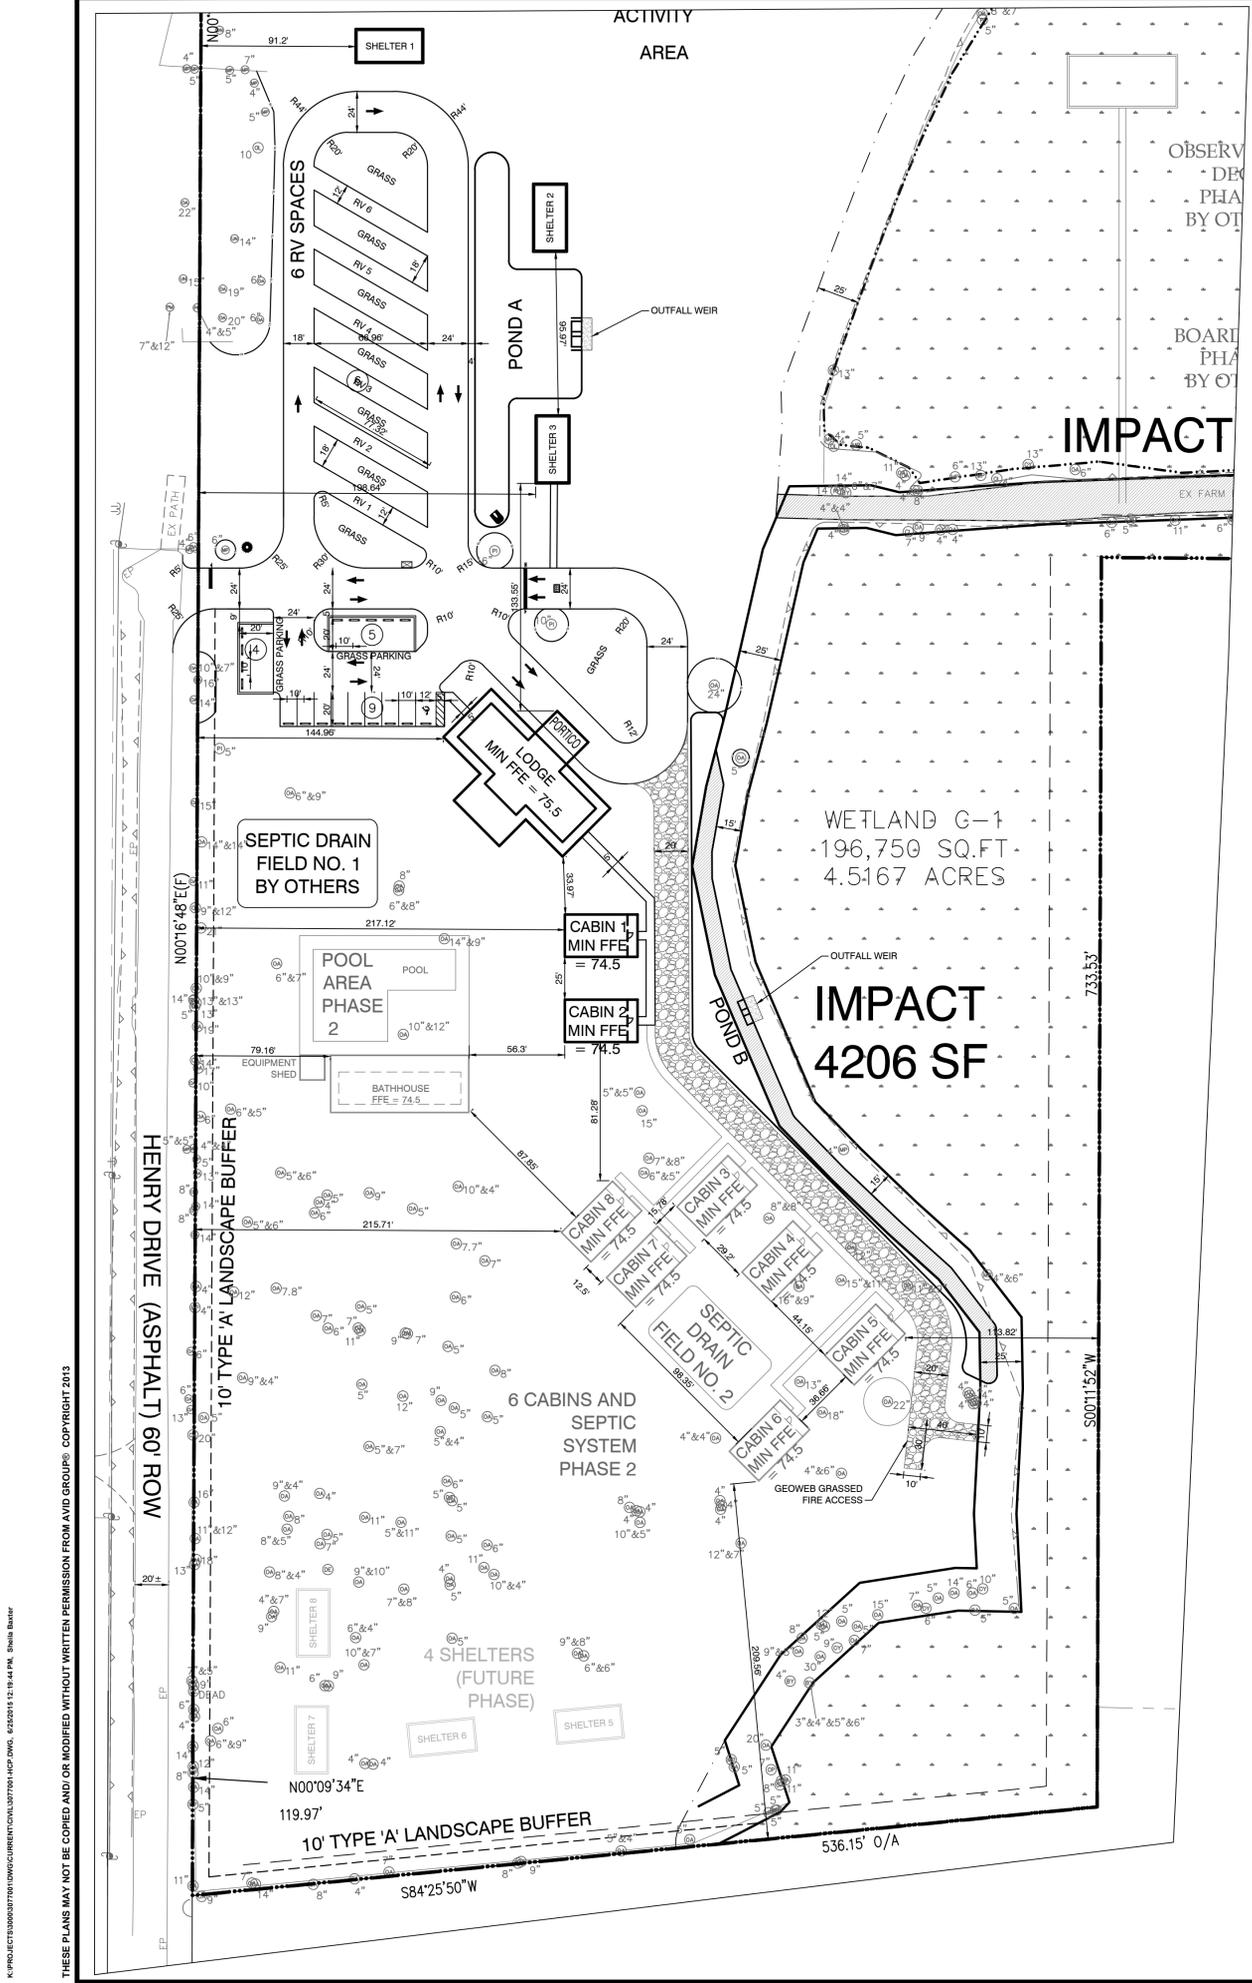

SITE LEGEND

	HANDICAP PARKING
	SITE BOUNDARY LINE
	CENTER LINE OF ROAD
	PROPOSED CURB
	EXISTING EDGE OF PAVEMENT
	PROPOSED CONCRETE PAVEMENT
TYP	TYPICAL
HC	HANDICAP
(11)	11 PARKING SPACES
S/W	SIDEWALK
R5'	5' RADIUS
LF	LINEAR FEET
SF	SQUARE FEET

PROPOSED CONSTRUCTION NOTES:

- ALL CURB RADI TO BE 3 FEET AND AT FACE OF CURB, UNLESS OTHERWISE NOTED.
- ALL DIMENSIONS FOR INTERNAL PARKING LOTS ARE TO THE FACE OF CURB, UNLESS OTHERWISE NOTED.
- CONCRETE SIDEWALK RAMPS SHALL BE INSTALLED ACCORDING TO F.D.O.T. INDEX 304 OR A.D.A. STANDARDS, WHICHEVER IS MORE RESTRICTIVE.

BUILDING REFERENCE:

BUILDING OUTLINE BASED UPON PLANS PROVIDED BY ARCHITECT, WITH AN ISSUE DATE OF DATE

STRIPING NOTES:

- TYPICAL PARKING SPACE SHALL BE STRIPED WITH A 6" WHITE STRIPE.
- SEE DETAILS FOR HANDICAP PARKING.
- STRIPING AND PAVEMENT MARKINGS SHALL CONFORM TO THE MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES.

SIGN LEGEND

NO.	TEXT OR SYMBOL	SIZE
R1-1	STOP	24"x24"
R5-1	DO NOT ENTER	24"x24"

ALL SIGNS SHALL CONFORM TO THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.

TREE SYMBOL LEGEND

	Australian Pine Tree		Hickory Tree
	Bay Tree		Holly Tree
	Bottle Brush Tree		Jacaranda Tree
	Black Cherry Tree		Laquat Tree
	Banana Tree		Magnolia Tree
	Brazilian Pepper Tree		Maple Tree
	Bush		Mimosa Tree
	Camphor Tree		Mulberry Tree
	Cedar Tree		Myrtle Tree
	Chinaberry Tree		Oak Tree
	Citrus Tree		Palm Tree
	Cherry Tree		Pine Tree
	Cypress Tree		Punk Tree
	Dead Tree		Sweet Gum Tree
	Elephant Ear Tree		Sycamore Tree
	Eucalyptus Tree		Unknown Tree
	Elm Tree		Willow Tree
	Evergreen Tree		

11	NO.	DATE	DESCRIPTION	BY
10				
9				
8				
7				
6				
5				
4				
3				
2				
1				

NOT VALID WITHOUT ORIGINAL SIGNATURE OF REGISTERED PROFESSIONAL ENGINEER AND GROUP AS SHOWN ON THESE PLANS.
 PROJECT MANAGER: R. AYERS
 TRIPLEX # 3077001
 DATE: 6/8/15

CAMP IDLEWILD OF FLORIDA, INC.
 CIVIL ENGINEERING 2000 CURLEW ROAD STE 201
 PASCAGO HARBOUR, FLORIDA 34885
 TRAFFIC/TRANSPORTATION SURVEYING GIS
 PHONE (727) 788-9500
 FAX (727) 784-6662
 AVID GROUP

CAMP IDLEWILD
 PASCAGO COUNTY, FLORIDA
 HORIZONTAL CONTROL PLAN

5

THESE PLANS MAY NOT BE COPIED AND OR MODIFIED WITHOUT WRITTEN PERMISSION FROM AVID GROUP, COPYRIGHT 2013

DESCRIPTION OF PURPOSE AND TYPES OF SOIL DISTURBING ACTIVITIES:

SOIL DISTURBING ACTIVITIES WILL INCLUDE: PERIMETER AND OTHER EROSION AND SEDIMENT CONTROLS THROUGHOUT THE SITE; GRADING; STORM SEWER, UTILITIES AND BUILDING FOUNDATIONS; CONSTRUCTION OF CURB AND PARKING LOT; PREPARATION FOR FINAL PLANTING AND SEEDING.

SEQUENCE OF MAJOR EVENTS:

1. INSTALL STAKED SILT FENCE AS INDICATED ON THE CONSTRUCTION PLANS.
2. EXCAVATE PONDS FOR SEDIMENT TRAPS FOR SITE RUNOFFS.
3. BEGIN BUILDING CONSTRUCTION.
4. CONSTRUCT DIVERSION SWALES AROUND PERIMETER OF SITE TO PONDS, AS NECESSARY.
5. INSTALL STORM SEWER SYSTEM AND ITS SILTATION PROTECTION, UTILITIES AND OUT FALL STRUCTURES.
6. STABILIZE PARKING LOT.
7. CONSTRUCT CURB, BASE AND ASPHALT.
8. COMPLETE FINAL SITE GRADING.
9. INSTALL PERMANENT LANDSCAPING ON SITE. REPAIR ANY WASHED OUT AREAS.
10. WHEN CONSTRUCTION ACTIVITY IS COMPLETE AND THE SITE IS STABILIZED, REMOVE EROSION PROTECTION DEVICES AND PLACE SOD AS NECESSARY.

NAME OF RECEIVING WATERS: HILLSBOROUGH RIVER

POLLUTION REDUCTION CONTROLS

EROSION AND SEDIMENT CONTROLS

STABILIZATION PRACTICES

WIND EROSION STABILIZATION – THE CONTRACTOR SHALL DENUDE ONLY AREAS WHERE IT IS EXPECTED TO BE GRADED OR ALTERED WITHIN A REASONABLE TIME FRAME. ALL PVIOUS AREAS OF THE SITE INCLUDED IN GRADING THAT ARE DISTURBED DURING CONSTRUCTION SHALL BE GRADED AND PREPARED WITH A COMBINATION OF SOD AND/OR SEEDING AND MULCHING. PAD AREAS WITHIN FUTURE UNITS WHERE EARTHWORK IS COMPLETED SHALL BE COMPLETELY SEEDDED AND MULCHED. AREAS WHERE CONSTRUCTION OPERATIONS WILL BE CONTINUOUS, FUGITIVE DUST SHALL BE MANAGED BY APPLYING A WATER SPRAY TO SATURATE THE SURFACE SOILS ON A DAILY BASIS (OR AS NEEDED) TO MAINTAIN MINIMAL DUST TRANSPORT. FUGITIVE DUST SHALL BE MONITORED CONTINUOUSLY AND ADDITIONAL MEASURES MAY NEED TO BE TAKEN TO CONTROL OFF SITE TRANSPORT OF UNACCEPTABLE LEVELS OF DUST.

TEMPORARY STABILIZATION – TOP OF SOIL STOCK PILES AND DISTURBED PORTIONS OF THE SITE WHERE CONSTRUCTION ACTIVITY TEMPORARILY CEASES FOR AT LEAST 21 DAYS SHALL BE STABILIZED WITH TEMPORARY GRASS AND MULCH OR OTHER APPROVED MEANS, NO LATER THAN 14 DAYS FROM THE LAST CONSTRUCTION ACTIVITY. GRASS SEED SHALL BE A MIXTURE OF 20 PARTS OF BERMUDA AND 80 PARTS OF PENSACOLA BAHIA. THE SEPARATE TYPES OF SEED USED SHALL BE THOROUGHLY DRY MIXED IMMEDIATELY BEFORE SOWING. SEED WHICH HAS BECOME WET SHALL NOT BE USED. THE MULCH MATERIAL USED SHALL NORMALLY BE DRY MULCH. DRY MULCH SHALL BE STRAW OR HAY CONSISTING OF OAT, RYE OR WHEAT STRAW, OR OF PANGOLA, PEANUT, COASTAL BERMUDA OR BAHIA GRASS HAY. ONLY UNDETERIORATED MULCH WHICH CAN BE READILY CUT INTO THE SOIL, SHALL BE USED. AREAS OF THE SITE WHICH ARE TO BE PAVED WILL BE TEMPORARILY STABILIZED BY APPLYING STABILIZATION AND BASE.

PERMANENT STABILIZATION – DISTURBED PORTIONS OF THE SITE WHERE CONSTRUCTION ACTIVITY PERMANENTLY CEASES SHALL BE STABILIZED WITH SOD NO LATER THAN 14 DAYS AFTER LAST CONSTRUCTION ACTIVITY.

STRUCTURAL PRACTICES

EROSION PROTECTION – DURING THE CONSTRUCTION PHASES, APPROPRIATE PRACTICES INCLUDING, BUT NOT LIMITED TO SILT FENCE BARRIERS, HAY BALES AND WATERING OR OTHER METHODS NECESSARY WILL BE IMPLEMENTED TO CONTROL FUGITIVE DUST. SEDIMENT BASINS – THE STORM WATER MANAGEMENT AREAS (RETENTION AREAS) WILL SERVE AS SEDIMENT BASINS DURING THE CONSTRUCTION PERIOD. AT THE CONTRACTOR'S DISCRETION, THE SEDIMENT BASINS WILL BE CONSTRUCTED TO THE DESIGN CROSS-SECTION OR A MINIMUM OF 2- FEET BELOW EXISTING GROUND TO ALLOW THE SILT TO BE COLLECTED AND REMOVED PRIOR TO COMPLETION OF THE GRADING.

STORM WATER MANAGEMENT

STORM WATER DRAINAGE WILL BE PROVIDED BY A CURB, STORM WATER AND CATCH BASIN SYSTEM FOR THE DEVELOPED AREAS. THE AREAS NOT DEVELOPED SHALL BE GRADED TO LESS THAN 2% SLOPES AND HAVE PERMANENT SEEDING OR PLANTINGS. WHEN CONSTRUCTION IS COMPLETE THE SITE WILL DRAIN TO STORM WATER PONDS THAT WERE UTILIZED AS THE TEMPORARY SEDIMENT BASINS DURING THE CONSTRUCTION PROCESS. ANY ACCUMULATED SEDIMENT SHALL BE REMOVED FROM THE SEDIMENT BASINS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO CONSTRUCT AL RETENTION/DETENTION AREAS IN ACCORDANCE WITH THE APPROVED CONSTRUCTION PLANS.

SPECIFIED OTHER CONTROLS

WASTE DISPOSAL

WASTE MATERIALS – ALL WASTE MATERIAL SHALL BE COLLECTED AND CONTAINED IN A CONTROLLED AREA PURSUANT TO STATE AND LOCAL SOLID WASTE REGULATIONS. ALL TRASH AND CONSTRUCTION DEBRIS GENERATED FROM CONSTRUCTION IS TO BE REMOVED FROM THE SITE AND DISPOSED OF APPROPRIATELY. NO CONSTRUCTION MATERIALS SHALL BE BURIED ON SITE. ALL PERSONNEL SHALL BE INSTRUCTED REGARDING THE CORRECT PROCEDURE FOR WASTE DISPOSAL. NOTICES STATING THESE PRACTICES SHALL BE POSTED IN THE ON SITE OFFICE TRAILER AND THE CONSTRUCTION MANAGER RESPONSIBLE FOR THE DAY TO DAY SITE OPERATIONS SHALL BE RESPONSIBLE FOR SEEING THAT THESE PROCEDURES ARE FOLLOWED.

HAZARDOUS WASTE – IF ENCOUNTERED, ALL WASTE MATERIALS SHALL BE DISPOSED OF IN THE MANNER SPECIFIED BY STATE AND/LOCAL REGULATIONS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR SEEING THAT THESE PRACTICES ARE FOLLOWED.

SANITARY WASTE – ALL SANITARY WASTE SHALL BE COLLECTED FROM PORTABLE UNITS BY A LICENSED SANITARY WASTE MANAGEMENT CONTRACTOR AS REQUIRED BY STATE AND LOCAL CODES AND REGULATIONS.

OFF SITE VEHICLE TRACKING

STABILIZED CONSTRUCTION ENTRANCES SHALL BE PROVIDED TO HELP REDUCE OFF SITE VEHICLE TRACKING OF SEDIMENTS. THE PAVED STREETS SHALL BE CLEANED AS NEEDED TO REMOVE ANY EXCESS MUD, DIRT OR ROCK TRACKED FROM THE SITE. DUMP TRUCKS HAULING MATERIAL FROM THE SITE SHALL BE COVERED WITH A TARPULIN AT ALL TIMES.

TIMING OF CONTROL MEASURES

AS INDICATED IN THE SEQUENCE OF MAJOR ACTIVITIES, STAKED SILT FENCE, STABILIZED CONSTRUCTION ENTRANCES AND SEDIMENT BASINS SHALL BE CONSTRUCTED PRIOR TO CLEARING OR GRADING OF ANY OTHER PORTIONS OF THE SITE. AREAS WHERE CONSTRUCTION ACTIVITY TEMPORARILY CEASES FOR MORE THAN 21 DAYS SHALL BE STABILIZED WITH A TEMPORARY GRASS AND MULCH WITHIN 14 DAYS OF THE LAST DISTURBANCE. ONCE CONSTRUCTION ACTIVITY CEASES PERMANENTLY THAT AREA SHALL BE STABILIZED WITH PERMANENT SOD. AFTER THE ENTIRE SITE IS STABILIZED, THE ACCUMULATED SEDIMENT SHALL BE REMOVED FROM THE TRAPS AND THE STAKED SILT FENCES SHALL BE REMOVED.

CERTIFICATION OF COMPLIANCE WITH FEDERAL, STATE AND LOCAL REGULATIONS

THE STORM WATER POLLUTION PREVENTION PLAN REFLECTS THE SOUTH WEST FLORIDA WATER MANAGEMENT DISTRICT (SWFWM) REQUIREMENTS FOR STORM WATER MANAGEMENT AND EROSION AND SEDIMENT CONTROL AS ESTABLISHED BY SWFWM STORM WATER MANAGEMENT PRACTICES MANUAL AND THE FLORIDA ADMINISTRATIVE CODE, CHAPTER 40D –4 AND 40D–40. TO ENSURE COMPLIANCE, THIS PLAN WAS PREPARED IN ACCORDANCE WITH SWFWM'S "BASIS OF REVIEW FOR SURFACE WATER MANAGEMENT PERMIT APPLICATIONS WITHIN THE SOUTH WEST FLORIDA WATER MANAGEMENT DISTRICT".

MAINTENANCE INSPECTION PROCEDURES

EROSION AND SEDIMENT CONTROL INSPECTION AND MAINTENANCE PRACTICES

THESE ARE THE INSPECTION AND MAINTENANCE PRACTICES THAT SHALL BE USED TO MAINTAIN EROSION AND SEDIMENT CONTROL:

1. ALL CONTROL MEASURES SHALL BE INSPECTED AT LEAST ONCE EACH WEEK AND FOLLOWING ANY STORM EVENT OF 0.5-INCHES OR GREATER BY A CONTRACTORS REPRESENTATIVE.
2. ALL MEASURES SHALL BE MAINTAINED IN GOOD WORKING ORDER; IF A REPAIR IS NECESSARY, IT SHALL BE INITIATED WITHIN 24 HOURS OF REPORT.
3. BUILT UP SEDIMENT SHALL BE REMOVED FROM SILT FENCE WHEN IT HAS REACHED ONE–THIRD THE HEIGHT OF THE SILT FENCE.
4. SILT FENCE SHALL BE INSPECTED REGULARLY FOR DEPTH OF SEDIMENT AND TEARS TO SEE IF THE FABRIC IS SECURELY ATTACHED TO THE FENCE POSTS AND TO SEE THAT THE FENCE POSTS ARE FIRMLY IN THE GROUND.
5. THE SEDIMENT BASINS SHALL BE INSPECTED DEPTH OF SEDIMENT AND BUILD UP OF SEDIMENT SHALL BE REMOVED WHEN IT REACHES 10% OF THE DESIGN CAPACITY OR AT THE END OF THE JOB.
6. TEMPORARY AND PERMANENT GRASSING AND MULCHING AND SODDING SHALL BE INSPECTED FOR BARE SPOTS, WASHOUTS AND HEALTHY GROWTH.
7. A MAINTENANCE INSPECTION REPORT SHALL BE MADE AFTER EACH INSPECTION BY THE CONTRACTOR AND SHALL BE KEPT IN AN ACTIVE LOG READILY AVAILABLE AT THE JOB SITE.
8. EITHER THE SITE SUPERINTENDENT OR HIS DESIGNEES SHALL BE RESPONSIBLE FOR INSPECTIONS, MAINTENANCE, REPAIR ACTIVITIES AND COMPLETING THE INSPECTION AND MAINTENANCE REPORT.
9. PERSONNEL SELECTED FOR INSPECTION AND MAINTENANCE RESPONSIBILITIES SHALL RECEIVE TRAINING FROM THE SITE SUPERINTENDENT. THEY SHALL BE TRAINED IN ALL THE INSPECTION AND MAINTENANCE PRACTICES NECESSARY FOR KEEPING THE EROSION AND SEDIMENT CONTROLS USED ON SITE IN GOOD WORKING ORDER.

NON–STORM WATER DISCHARGE

IT IS EXPECTED THAT THE FOLLOWING NON–STORM WATER DISCHARGES WILL OCCUR FROM THE SITE DURING THE CONSTRUCTION PERIOD:

1. WATER FROM WATER LINE FLUSHING.
2. PAVEMENT WASH WATERS (WHERE NO SPILLS OR LEAKS OF TOXIC OR HAZARDOUS MATERIALS HAVE OCCURRED).
3. UNCONTAMINATED GROUNDWATER (FROM DEWATERING EXCAVATION). ALL NON–STORM WATER DISCHARGES SHALL BE DIRECTED TO THE SEDIMENT BASIN PRIOR TO DISCHARGE.

NON–STORM WATER DISCHARGE

IT IS EXPECTED THAT THE FOLLOWING NON–STORM WATER DISCHARGES SHALL OCCUR FROM THE SITE DURING THE CONSTRUCTION PERIOD:

CONCRETE	FERTILIZERS
DETERGENTS	PETROLEUM BASED
PAINTS (ENAMEL AND LATEX) METAL STUDS	PRODUCTS AND FUELS
GLASS	CLEANING SOLVENTS
TAR	WOOD
SAND	MASONRY BLOCK
	ROOFING SHINGLES
	STONE

SPILL PREVENTION

MATERIAL MANAGEMENT PRACTICES

THE FOLLOWING ARE THE MATERIAL MANAGEMENT PRACTICES THAT SHALL BE USED TO REDUCE THE RISK OF SPILLS OR OTHER ACCIDENTAL EXPOSURE OF MATERIALS AND SUBSTANCES TO STORM WATER RUNOFF.

GOOD HOUSEKEEPING

THE FOLLOWING GOOD HOUSEKEEPING PRACTICES SHALL BE FOLLOWED ON SITE DURING THE CONSTRUCTION PROJECT. AN EFFORT SHALL BE MADE TO STORE ONLY ENOUGH PRODUCT REQUIRED TO COMPLETE THE PROJECT. ALL MATERIALS STORED ON SITE SHALL BE STORED IN A NEAT ORDERLY MANNER IN THEIR APPROPRIATE CONTAINERS AND IF POSSIBLE, UNDER A ROOF OR OTHER CONTAINED ENCLOSURE. PRODUCTS SHALL BE KEPT IN THEIR ORIGINAL MANUFACTURE'S LABELED CONTAINERS. SUBSTANCES SHALL NOT BE MIXED WITH ONE ANOTHER UNLESS RECOMMENDED BY THE MANUFACTURE. WHENEVER POSSIBLE, ALL OF THE PRODUCT SHALL BE USED BEFORE DISPOSING OF THE CONTAINER. MANUFACTURE'S RECOMMENDATIONS FOR PROPER USE AND DISPOSAL SHALL BE FOLLOWED. THE SITE SUPERINTENDENT SHALL INSPECT DAILY TO ENSURE PROPER USE AND DISPOSAL OF MATERIALS ON SITE.

HAZARDOUS PRODUCTS

THESE PRACTICES ARE USED TO REDUCE THE RISKS ASSOCIATED WITH HAZARDOUS MATERIALS. PRODUCTS SHALL BE KEPT IN ORIGINAL CONTAINERS UNLESS THEY ARE NOT RESEALABLE. ORIGINAL LABELS AND MATERIAL SAFETY DATA SHALL BE RETAINED; THEY CONTAIN IMPORTANT PRODUCT INFORMATION. IF SURPLUS PRODUCT MUST BE DISPOSED OF, MANUFACTURE'S OR LOCAL AND STATE RECOMMENDED METHODS OF PROPER DISPOSAL SHALL BE FOLLOWED.

PETROLEUM PRODUCTS

ALL ON SITE VEHICLES SHALL BE MONITORED FOR LEAKS AND RECEIVE REGULAR PREVENTATIVE MAINTENANCE TO REDUCE THE CHANCE OF LEAKAGE. PETROLEUM PRODUCTS SHALL BE STORED IN TIGHTLY SEALED CONTAINERS WHICH ARE CLEARLY LABELED. ANY ASPHALT SUBSTANCES USED ON SITE SHALL BE APPLIED ACCORDINGLY TO THE MANUFACTURE'S RECOMMENDATIONS.

FERTILIZERS

FERTILIZERS USED SHALL BE APPLIED ONLY IN THE MINIMUM AMOUNT RECOMMENDED BY THE MANUFACTURER. ONCE APPLIED, FERTILIZER SHALL BE WORKED INTO THE SOIL TO LIMIT EXPOSURE TO STORM WATER. STORAGE SHALL BE IN A COVERED SHED. THE CONTENTS OF ANY PARTIALLY USED BAGS OF FERTILIZER SHALL BE TRANSFERRED TO A SEALABLE PLASTIC BIN TO AVOID SPILLS.

PAINTS

ALL CONTAINERS SHALL BE TIGHTLY SEALED AND STORED WHEN NOT REQUIRED FOR USE. EXCESS PAINT SHALL NOT BE DISCHARGED TO THE STORM SEWER SYSTEM BUT SHALL BE PROPERLY DISPOSED OF ACCORDING TO MANUFACTURE'S INSTRUCTIONS OR STATE AND LOCAL REGULATIONS. CONCRETE TRUCKS: CONTRACTOR SHALL DESIGNATE AN AREA FOR DISCHARGE OF SURPLUS CONCRETE OR DRUM WASH WATER AND SHALL INSTALL A CONTAINMENT BERM AROUND THIS AREA TO PREVENT RUNOFF TO THE REMAINDER OF THE SITE. HARD DEBRIS SHALL BE DISPOSED OF BY CONTRACTOR UPON COMPLETION OF THE PROJECT.

SPILL CONTROL PRACTICES

IN ADDITION TO THE GOOD HOUSEKEEPING AND MATERIAL MANAGEMENT PRACTICES DISCUSSED IN THE PREVIOUS SECTIONS OF THIS PLAN, THE FOLLOWING PRACTICES SHALL BE FOLLOWED FOR SPILL PREVENTION AND CLEANUP:

MANUFACTURES' RECOMMENDED METHODS FOR SPILL CLEAN UP SHALL BE CLEARLY POSTED AND SITE PERSONNEL SHALL BE MADE AWARE OF THE PROCEDURES AND THE LOCATION OF THE INFORMATION AND CLEAN UP SUPPLIES.

MATERIALS AND EQUIPMENT NECESSARY FOR SPILL CLEAN UP SHALL BE KEPT IN THE MATERIAL STORAGE AREA ON SITE. EQUIPMENT AND MATERIALS SHALL INCLUDE, BUT NOT BE LIMITED TO, BROOMS, DUST PANS, MOPS, RAGS, GLOVES, GOGGLES, KITTY LITTER, SAND, SAWDUST AND PLASTIC AND METAL TRASH CONTAINERS.

ALL SPILLS SHALL BE CLEANED UP IMMEDIATELY AFTER DISCOVERY.

THE SPILL SHALL BE KEPT WELL VENTILATED AND PERSONNEL SHALL WEAR APPROPRIATE PROTECTIVE CLOTHING TO PREVENT INJURY FROM CONTACT WITH HAZARDOUS SUBSTANCE.

SPILLS OF TOXIC OR HAZARDOUS MATERIAL SHALL BE REPORTED TO THE APPROPRIATE STATE OR LOCAL GOVERNMENT AGENCY, REGARDLESS OF THE SIZE.

THE SPILL PREVENTION PLAN SHALL BE ADJUSTED TO INCLUDE MEASURES TO PREVENT THIS TYPE OF SPILL FROM REOCCURRING AND THE CLEAN UP PROCEDURES FOR FUTURE USE. A DESCRIPTION OF THE SPILL, ITS CAUSE AND THE CLEAN UP MEASURES SHALL ALSO BE INCLUDED.

THE SITE SUPERINTENDENT RESPONSIBLE FOR THE DAY TO DAY SITE OPERATIONS SHALL BE THE SPILL PREVENTION AND CLEAN UP COORDINATOR. HE OR SHE SHALL DESIGNATE OTHER SITE PERSONNEL WHO WILL RECEIVE SPILL PREVENTION AND CLEAN UP TRAINING. THESE INDIVIDUALS SHALL EACH BECOME RESPONSIBLE FOR A PARTICULAR PHASE OF PREVENTION AND CLEAN UP. THE NAMES OF THE RESPONSIBLE SPILL PERSONNEL SHALL BE POSTED IN THE MATERIAL STORAGE AREA OR IN THE OFFICE TRAILER ON SITE, IF APPLICABLE.

NOTICE OF TERMINATION

A NOTICE OF TERMINATION SHALL BE SUBMITTED TO THE FDEP AFTER THE CONSTRUCTION HAS BEEN COMPLETED AND THE SITE HAS UNDERGONE FINAL STABILIZATION.

POLLUTION PREVENTION PLAN CERTIFICATION

TO THE BEST OF MY KNOWLEDGE, I CERTIFY UNDER PENALTY OF LAW THAT THIS DOCUMENT AND ALL ATTACHMENTS WERE PREPARED UNDER MY DIRECTION OR SUPERVISION IN ACCORDANCE WITH A SYSTEM DESIGNED TO ASSURE THAT QUALIFIED PERSONNEL PROPERLY GATHER AND EVALUATE THE INFORMATION SUBMITTED. BASED ON MY INQUIRY OF THE PERSON OR PERSONS MANAGE THE SYSTEM, OR THOSE PERSONS DIRECTLY RESPONSIBLE FOR GATHERING THE INFORMATION SUBMITTED IS, TO THE BEST OF MY KNOWLEDGE AND BELIEF, TRUE, ACCURATE AND COMPLETE. I AM AWARE THAT THERE ARE SIGNIFICANT PENALTIES FOR SUBMITTING FALSE INFORMATION, INCLUDING THE POSSIBILITY OF FINES AND IMPRISONMENT FOR KNOWING VIOLATIONS.

OWNER: _____

NAME: _____ TITLE: _____











SIGNATURE: _____ DATE: _____

CONTRACTOR'S CERTIFICATION

I CERTIFY UNDER PENALTY OF LAW THAT I UNDERSTAND THE TERMS AND CONDITIONS OF THE GENERAL NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM (NPDES) PERMIT THAT AUTHORIZES THE STORM WATER DISCHARGES ASSOCIATED WITH CONSTRUCTION ACTIVITY FROM THE SITE IDENTIFIED AS PART OF THIS CERTIFICATION.

SIGNATURE	COMPANY NAME AND ADDRESS	RESPONSIBLE FOR
SIGNATURE: _____ NAME: _____ DATE: _____	COMPANY: _____ ADDRESS: _____ PHONE: _____	GENERAL CONTRACTOR
SIGNATURE: _____ NAME: _____ DATE: _____	COMPANY: _____ ADDRESS: _____ PHONE: _____	TEMPORARY AND PERMANENT STABILIZATION
SIGNATURE: _____ NAME: _____ DATE: _____	COMPANY: _____ ADDRESS: _____ PHONE: _____	STABILIZED CONSTRUCTION ENTRANCE, EARTH DIKES, SEDIMENT BASIN

11	10	9	8	7	6	5	4	3	2	1	NO.	DATE	DESCRIPTION	BY
NOT VALID WITHOUT ORIGINAL REGISTERED PROFESSIONAL SEAL AND SIGNATURE OF R. AYERS														
PROJECT # 3077001														
DATE: 6/8/15														
CAMP IDLEWILD OF FLORIDA, INC. CIVIL ENGINEERING 5000 CURLEW ROAD, SITE 201 PASCAGO COUNTY, PASCO COUNTY, FLORIDA TRAFFIC/TRANSPORTATION 34883 SURVEYING GIS PHONE (727) 784-9500 FAX (727) 784-6662 AVID GROUP® AVIDGROUP.COM														
CAMP IDLEWILD PASCO COUNTY, FLORIDA NPDES NOTES														
8														

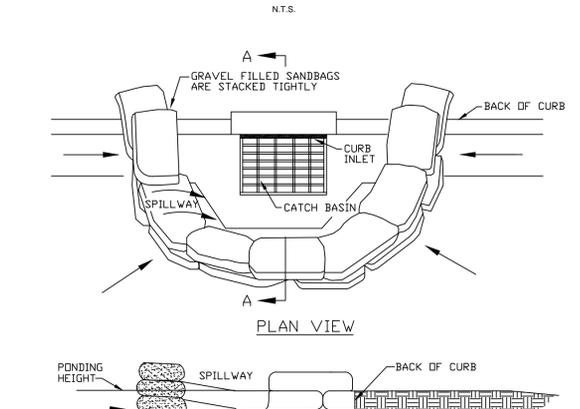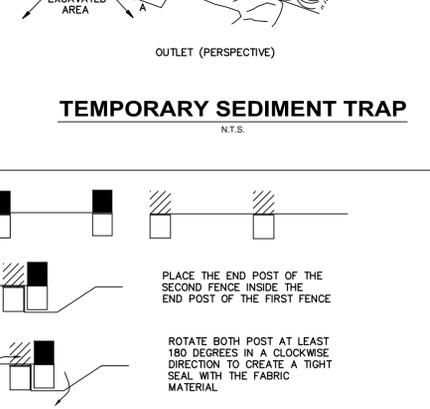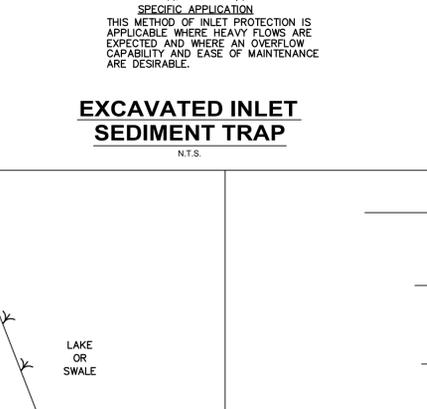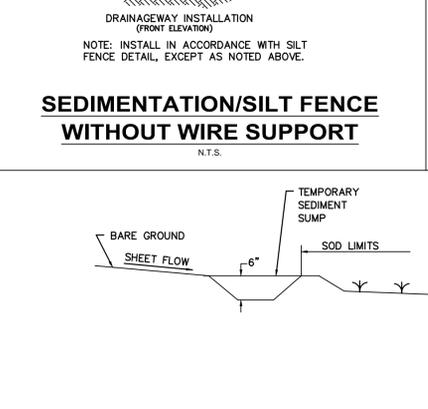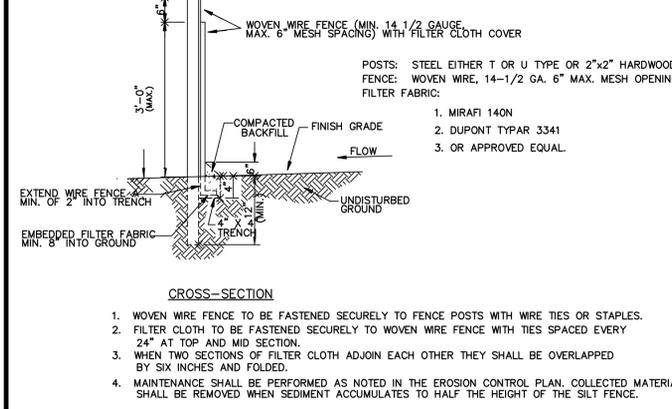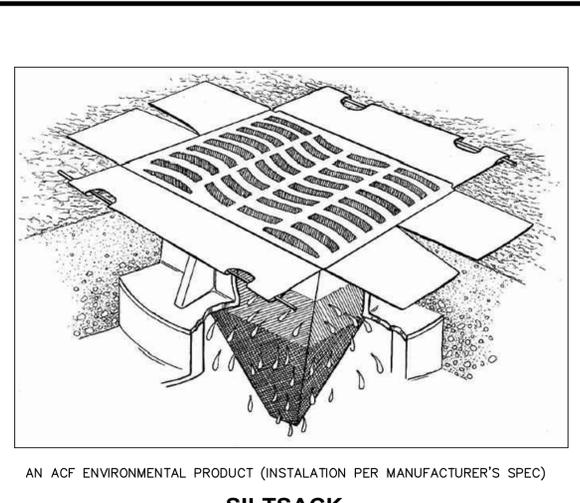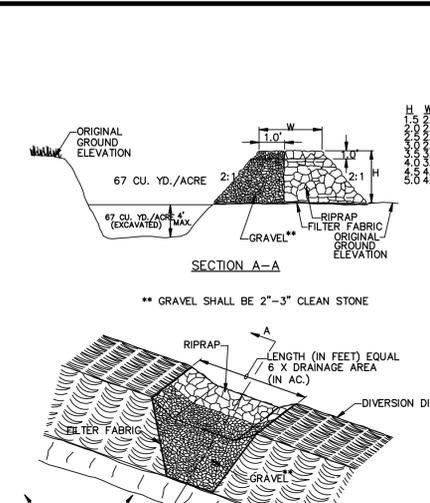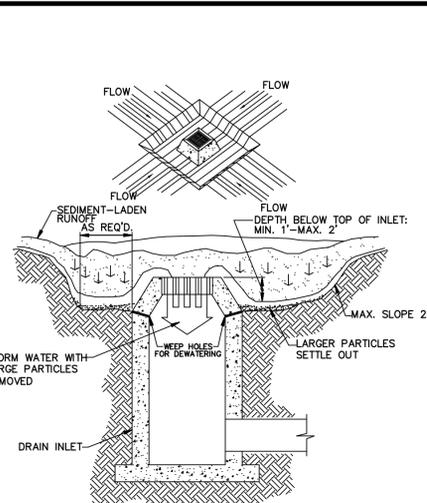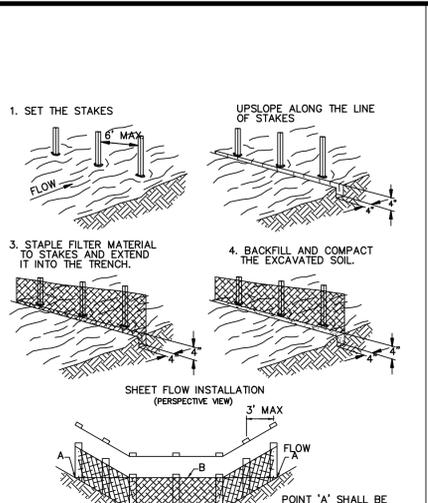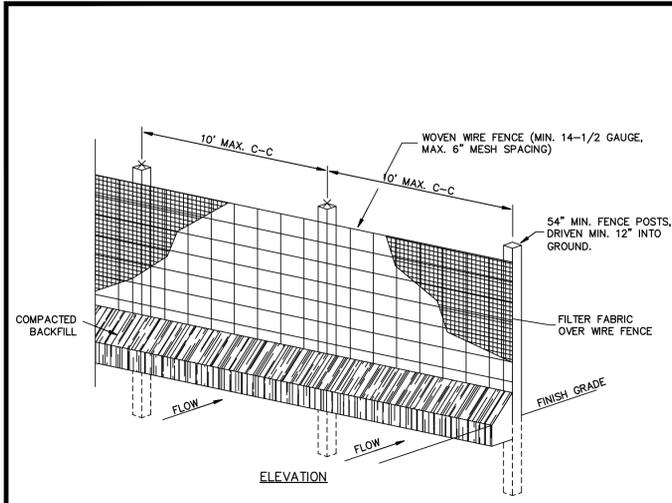












SEDIMENTATION/SILT FENCE W/ WIRE SUPPORT
N.T.S.

TEMPORARY SEDIMENT SUMP
N.T.S.

ATTACHING TWO SILT FENCES
N.T.S.

CURB INLET PROTECTION DETAIL
N.T.S.

TEMPORARY CONSTRUCTION ACCESS DETAIL
N.T.S.

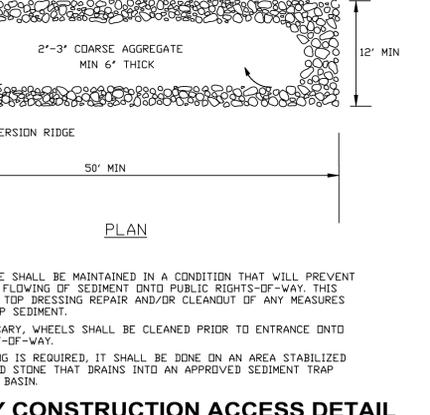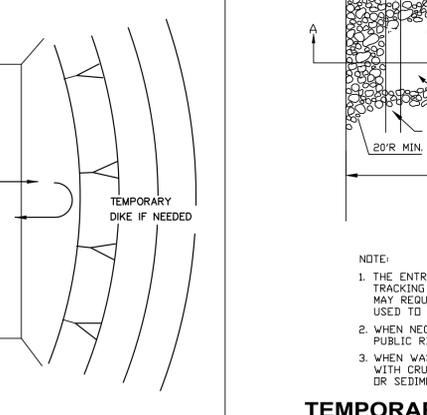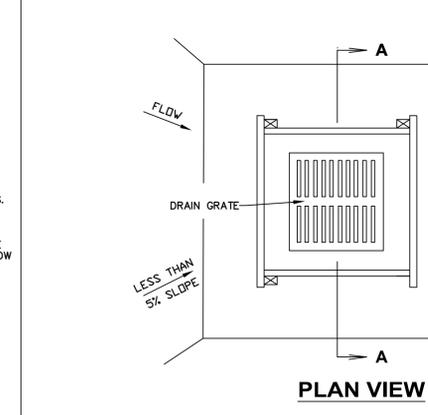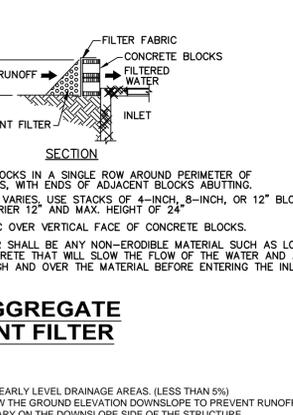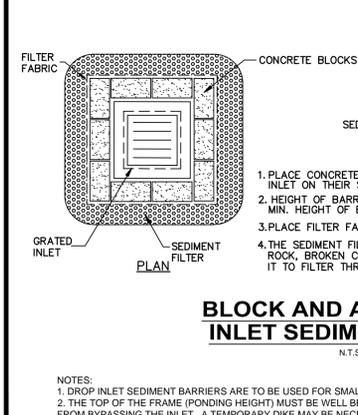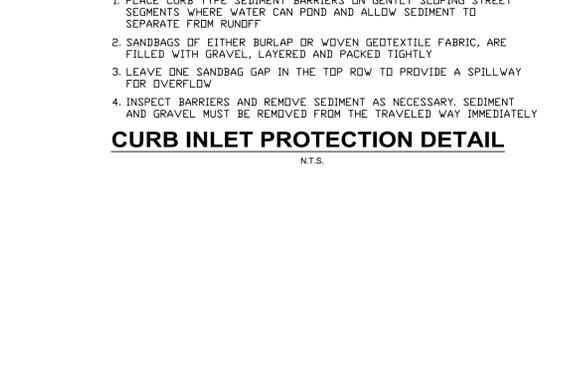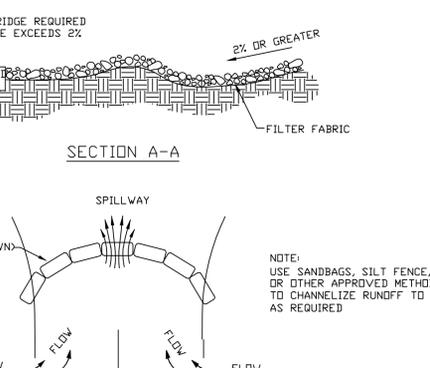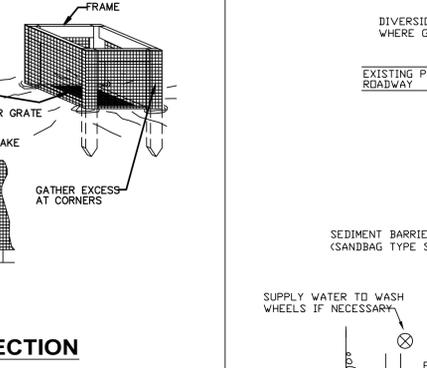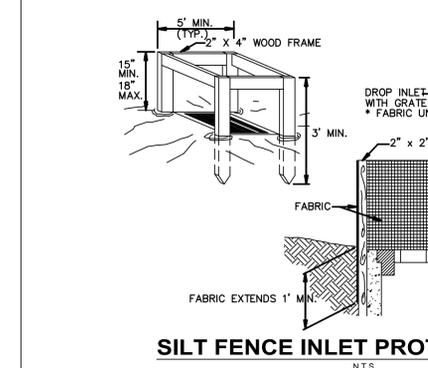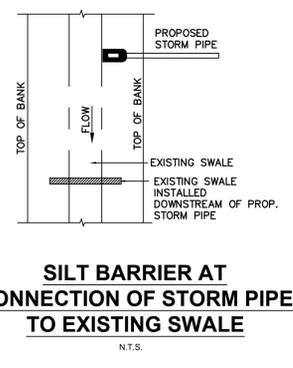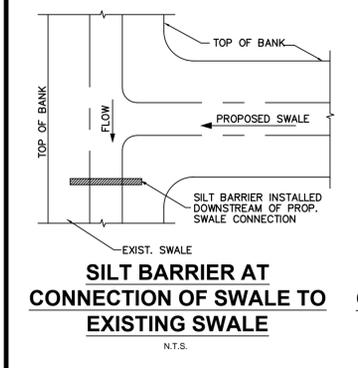

BLOCK AND AGGREGATE INLET SEDIMENT FILTER
N.T.S.

TEMPORARY CONSTRUCTION ACCESS DETAIL
N.T.S.

THESE PLANS MAY NOT BE COPIED AND/OR MODIFIED WITHOUT WRITTEN PERMISSION FROM AVID GROUP, INC. COPYRIGHT 2013.


NO.	DATE	DESCRIPTION	BY
11	6/8/15		
10			
9			
8			
7			
6			
5			
4			
3			
2			
1			

NOT VALID WITHOUT ORIGINAL REGISTERED PROFESSIONAL SEAL AND SIGNATURE OF R. AYERS, P.E. PROJECT NO. 3077001 DATE: 6/8/15

CAMP IDLEWILD OF FLORIDA, INC.
 CIVIL ENGINEERING 3000 CURLEW ROAD, STE 201
 PASCAGO, FLORIDA 34883
 TRAFFIC/TRANSPORTATION SURVEYING GIS
 PHONE (727) 788-9500
 FAX (727) 784-6662
 AVID GROUP


CAMP IDLEWILD
PASCO COUNTY, FLORIDA
NPDES DETAILS
9

ATTENTION: THE EROSION/SEDIMENTATION LOCATIONS AND DETAILS SET FORTH IN THIS SITE PLAN HAVE BEEN DEVISED BY THE PROJECT ENGINEER TO MEET THE REQUIREMENTS OF THE FEDERAL NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM (NPDES) PROGRAM. FAILURE TO MAINTAIN THESE CONTROLS, OR AN ILLICIT DISCHARGE RESULTING FROM THEIR FAILURE WILL LIKELY RESULT IN FINE CITATIONS. SEC. 58-239 OF THE PINELLAS COUNTY CODE AUTHORIZES PENALTIES OF UP TO \$10,000.00 FOR EACH OFFENSE.

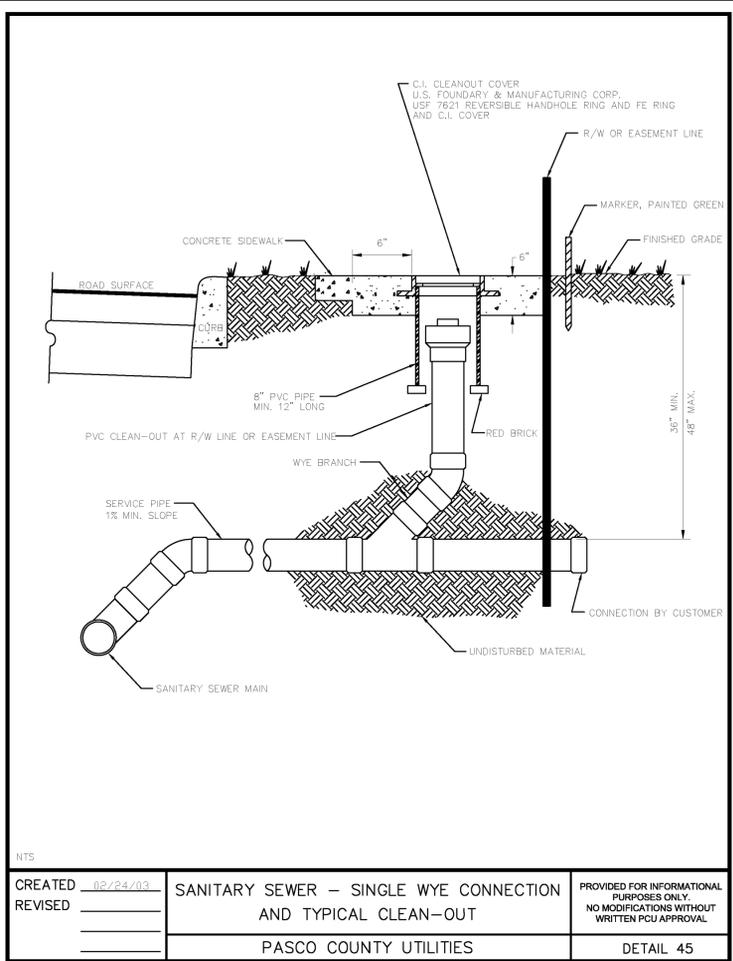


NTS

CREATED	02/24/03	SANITARY SEWER - SINGLE WYE CONNECTION AND TYPICAL CLEAN-OUT	PROVIDED FOR INFORMATIONAL PURPOSES ONLY. NO MODIFICATIONS WITHOUT WRITTEN PCU APPROVAL
REVISED			
		PASCO COUNTY UTILITIES	DETAIL 45

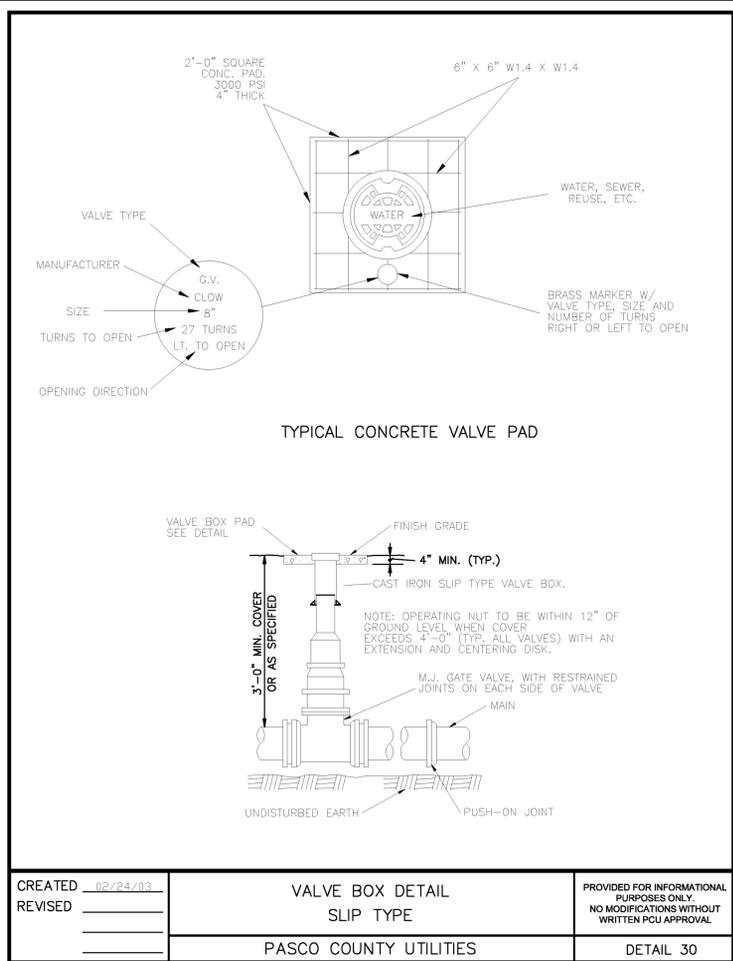

CREATED	02/24/03	VALVE BOX DETAIL SLIP TYPE	PROVIDED FOR INFORMATIONAL PURPOSES ONLY. NO MODIFICATIONS WITHOUT WRITTEN PCU APPROVAL
REVISED			
		PASCO COUNTY UTILITIES	DETAIL 30

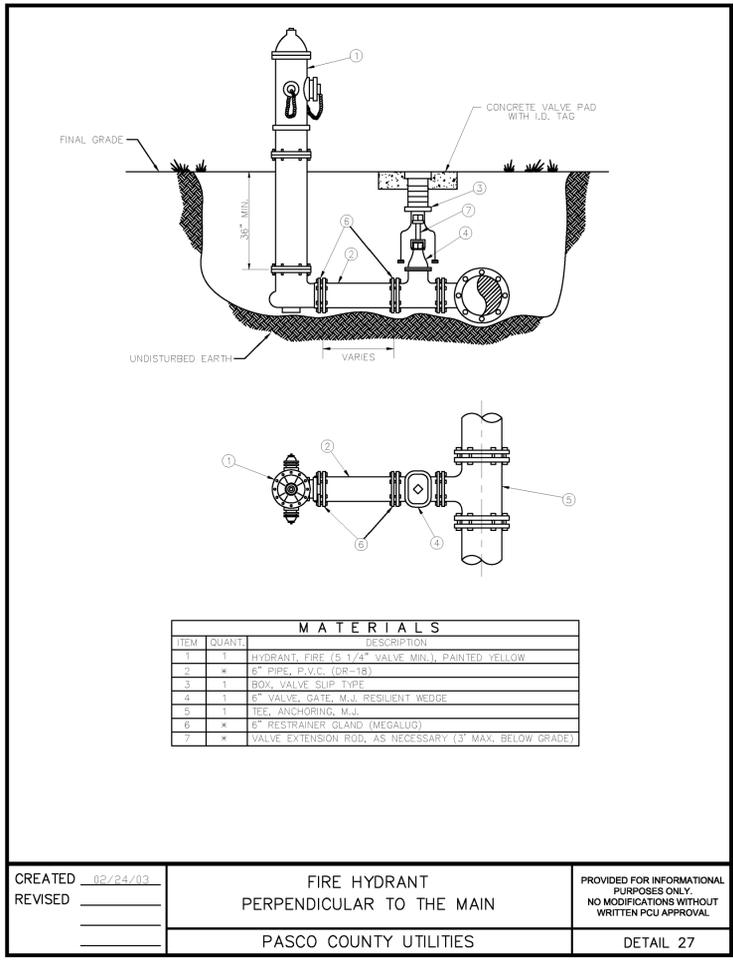

ITEM	QUANT.	DESCRIPTION
1	1	HYDRANT, FIRE (5 1/4\"/>

CREATED	02/24/03	FIRE HYDRANT PERPENDICULAR TO THE MAIN	PROVIDED FOR INFORMATIONAL PURPOSES ONLY. NO MODIFICATIONS WITHOUT WRITTEN PCU APPROVAL
REVISED			
		PASCO COUNTY UTILITIES	DETAIL 27

PIPE RESTRAINT LENGTHS IN FEET TEES (BRANCH SIDE)

		WATER MAINS - TEST PRESSURE 150 PSI								
		BRANCH SIZE								
		3"	4"	6"	8"	10"	12"	16"	20"	24"
RUN SIZE	3"	6'	14'	30'	—	—	—	—	—	—
	4"	2'	11'	28'	44'	—	—	—	—	—
	6"	1'	2'	22'	40'	52'	—	—	—	—
	8"	1'	1'	16'	35'	48'	62'	—	—	—
	10"	1'	1'	10'	30'	44'	58'	83'	—	—
	12"	1'	1'	3'	25'	40'	55'	80'	103'	—
	16"	1'	1'	1'	14'	31'	48'	75'	98'	119'
20"	1'	1'	1'	2'	22'	40'	69'	94'	116'	
24"	1'	1'	1'	1'	11'	31'	63'	89'	111'	

RESTRAINT LENGTHS ARE MEASURED FROM THE CENTER LINE OF THE TEE ALONG THE BRANCH FOR THE DISTANCE INDICATED. A MINIMUM OF 5 FEET OF RESTRAINED PIPE MUST BE INSTALLED ON BOTH RUNS OF THE TEE. MEGALUG TYPE RESTRAINERS ARE REQUIRED ON ALL JOINTS.

CREATED	02/24/03	RESTRAINED JOINT TABLE TEES (BRANCH SIDE)	PROVIDED FOR INFORMATIONAL PURPOSES ONLY. NO MODIFICATIONS WITHOUT WRITTEN PCU APPROVAL
REVISED			
		PASCO COUNTY UTILITIES	DETAIL 32

PIPE RESTRAINT LENGTHS IN FEET COMMON FITTINGS

		WATER MAINS - TEST PRESSURE 150 PSI				
		FITTING TYPE				
		11-1/4°	22-1/2°	45°	90°	DEAD END
PIPE SIZE	4"	2'	4'	8'	20'	45'
	6"	3'	6'	12'	28'	63'
	8"	4'	7'	15'	36'	82'
	10"	4'	9'	18'	43'	98'
	12"	5'	10'	21'	50'	116'
	16"	6'	13'	26'	63'	148'
20"	7'	15'	31'	76'	179'	
24"	9'	17'	36'	87'	208'	

		FORCE MAINS - TEST PRESSURE 100 PSI				
		FITTING TYPE				
		11-1/4°	22-1/2°	45°	90°	DEAD END
PIPE SIZE	4"	1'	3'	6'	13'	30'
	6"	2'	4'	8'	19'	42'
	8"	2'	5'	10'	24'	55'
	10"	3'	6'	12'	29'	66'
	12"	3'	7'	14'	34'	77'
	16"	4'	8'	18'	42'	99'
20"	5'	10'	21'	50'	119'	
24"	6'	11'	24'	58'	139'	

RESTRAINT LENGTHS ARE MEASURED FROM THE CENTER LINE OF THE FITTING ALONG THE PIPE IN BOTH DIRECTIONS (EXCEPT DEAD ENDS).

CREATED	02/24/03	RESTRAINED JOINT TABLE COMMON FITTINGS	PROVIDED FOR INFORMATIONAL PURPOSES ONLY. NO MODIFICATIONS WITHOUT WRITTEN PCU APPROVAL
REVISED			
		PASCO COUNTY UTILITIES	DETAIL 31

THESE PLANS MAY NOT BE COPIED AND/OR MODIFIED WITHOUT WRITTEN PERMISSION FROM AVID GROUP, COPYRIGHT 2013
 K:\PROJECTS\030807\01\DWG\CURRENT\030807\01\030807.DWG, 6/25/2015 12:23:29 PM, S:\naa\Bauer

NO.	DATE	DESCRIPTION
11	6/8/15	
10		
9		
8		
7		
6		
5		
4		
3		
2		
1		

NOT VALID WITHOUT ORIGINAL SIGNATURE OF REGISTERED PROFESSIONAL CIVIL ENGINEER R. AYERS
 PROJECT NO. 3077001
 DATE: 6/8/15


CAMP IDLEWILD OF FLORIDA, INC.
 3000 CURELY ROAD, SUITE 201
 PALM HARBOR, FLORIDA 34883
 CIVIL ENGINEERING
 TRAFFIC/TRANSPORTATION SURVEYING GIS
 PHONE (727) 788-9500
 FAX (727) 784-6662
 AVIDGROUP.COM

AVID GROUP


CAMP IDLEWILD
 PASCO COUNTY, FLORIDA

DETAILS 2


11

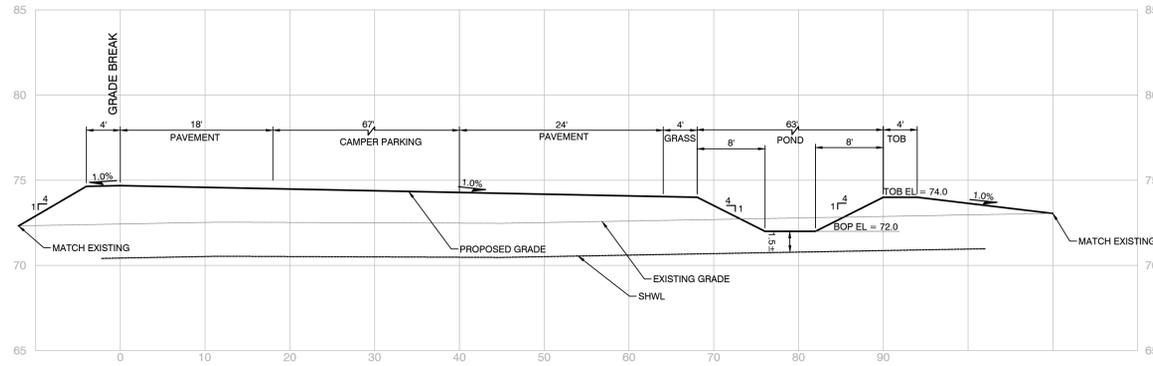


**POND A
SECTION A-A**
1" = 10' (HORIZONTAL)
1" = 5' (VERTICAL)

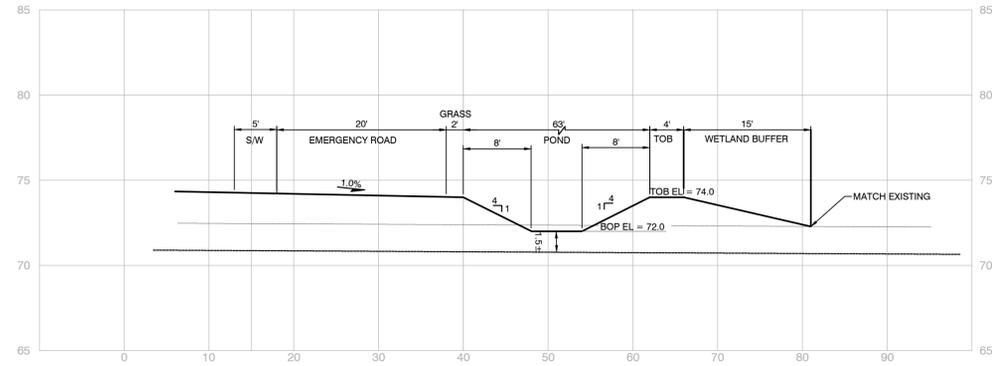

**POND B
SECTION B-B**
1" = 10' (HORIZONTAL)
1" = 5' (VERTICAL)

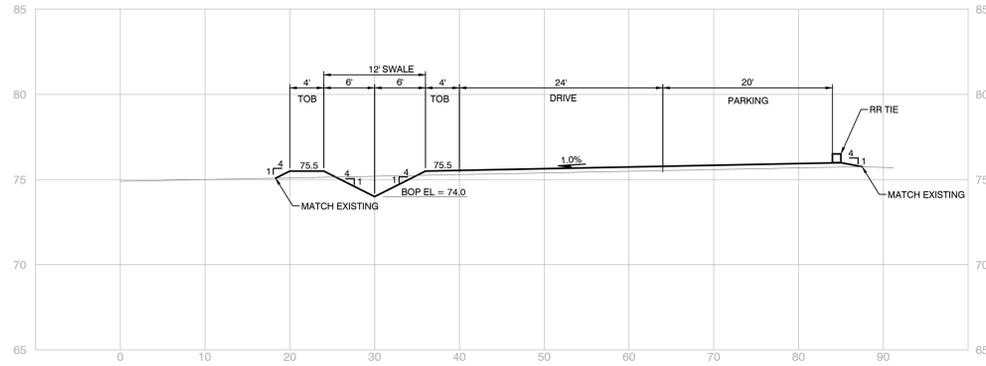

**POND C
SECTION C-C**
1" = 10' (HORIZONTAL)
1" = 5' (VERTICAL)

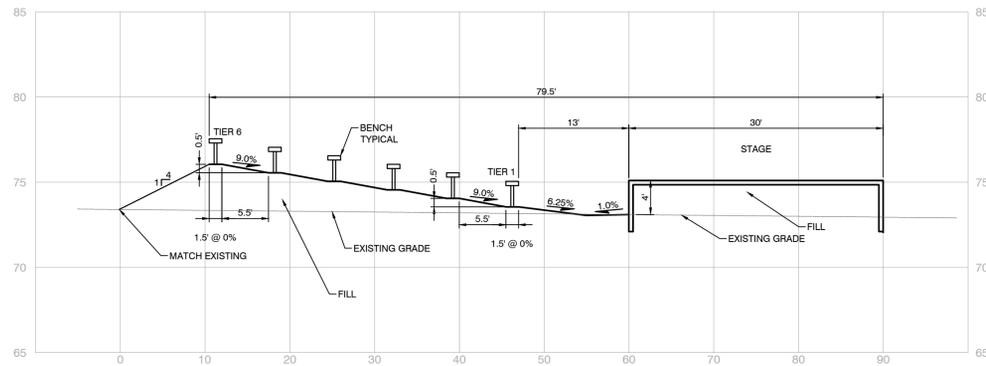

**AMPHITHEATER AND STAGE
SECTION D-D**
1" = 10' (HORIZONTAL)
1" = 5' (VERTICAL)

NO.	DATE	DESCRIPTION	BY
11			
10			
9			
8			
7			
6			
5			
4			
3			
2			
1			

NOT VALID WITHOUT ORIGINAL SIGNATURE OF REGISTERED PROFESSIONAL ENGINEER
 PROJECT MANAGER: R. AYERS
 PROJECT NO.: 3077001
 DATE: 6/8/15

CAMP IDLEWILD OF FLORIDA, INC.


CIVIL ENGINEERING 3000 CURLEW ROAD, STE 201
 WILLOW PLANTATION PALM HARBOR, FLORIDA 34883
 TRAFFIC/TRANSPORTATION SURVEYING GIS
 PHONE (727) 784-9500
 FAX (727) 784-6662
 AVIDGROUP.COM




**CAMP IDLEWILD
PASCO COUNTY, FLORIDA**

CROSS SECTIONS


THESE PLANS MAY NOT BE COPIED AND/OR MODIFIED WITHOUT WRITTEN PERMISSION FROM AVID GROUP. COPYRIGHT 2013

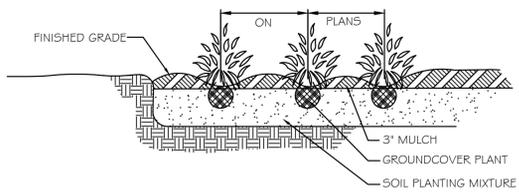


**GROUNDCOVER
PLANTING DETAIL**

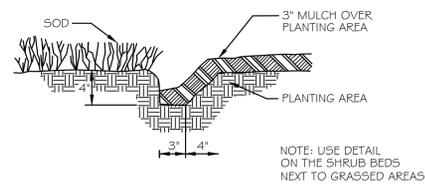


**LAWN/PLANTING AREA
EDGE DETAIL**

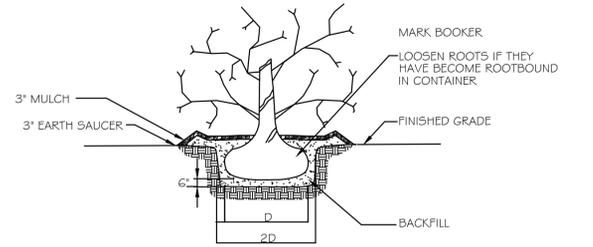


**TYPICAL SHRUB
PLANTING DETAIL**

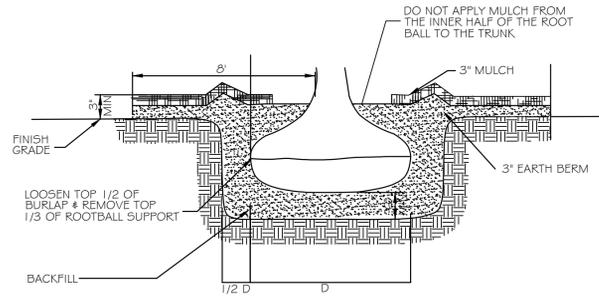



TREE PIT DETAIL

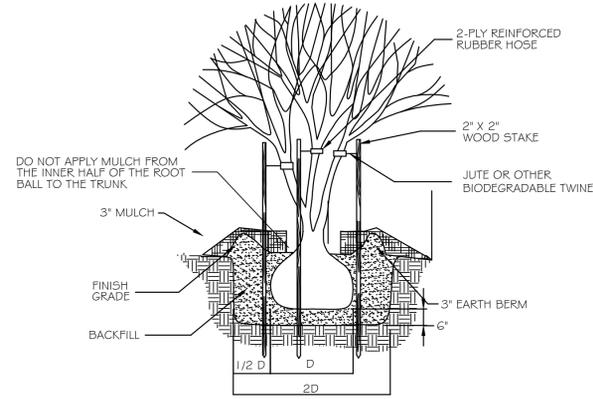

MULTI TRUNK TREE PLANTING DETAIL

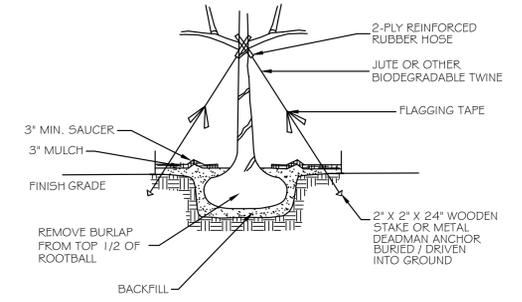

TREE STAKING DETAIL

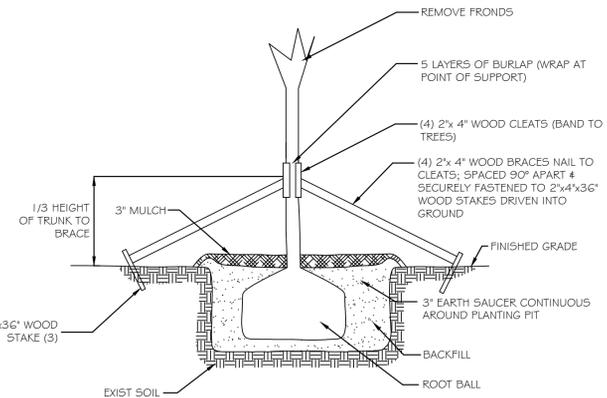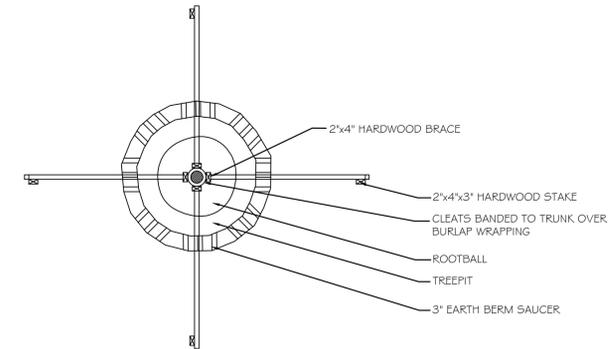

PALM TREE PLANTING DETAIL

NO.	DATE	DESCRIPTION	BY
11			
10			
9			
8			
7			
6			
5			
4			
3			
2			
1			

NOT VALID WITHOUT ORIGINAL SIGNATURE OF REGISTERED PROFESSIONAL CIVIL ENGINEER
 DATE: 05-26-15
 PROJECT: 2980-003
 TITLE: PROJECT MANAGER
 NAME: R. AYERS

**05/26/15
REVIEW SET
NOT FOR
CONSTRUCTION**

SEMINOLE MALL LP
 CIVIL ENGINEERING 3800 CURLEW ROAD, SUITE 201
 PALM HARBOR, FLORIDA 34883
 TRAFFIC/TRANSPORTATION SURVEYING GIS
AVID GROUP
 PHONE (727) 784-9500
 FAX (727) 784-6662
 AVIDGROUP.COM

**SEMINOLE CITY CENTER
SEMINOLE, FLORIDA
LANDSCAPE DETAILS**

THESE PLANS MAY NOT BE COPIED AND/OR MODIFIED WITHOUT WRITTEN PERMISSION FROM AVID GROUP, COPYRIGHT 2013

